BEIQIANG

BEIQIANG

FORKLIFT SPECIALISTS

Integrity | Professionalism | Quality | Innovation

Promotion of Mechanical Technology, Sales of Complete Machinery and Parts, and Technical Consulting

PROFESSIONAL
RELIABLE
INNOVATIVE



Xingtai Beiqiang Machinery Manufacturing Factory

YOUR TRUSTED PARTNER
IN MATERIAL HANDLING SOLUTIONS

www.bq-forklift.com

北强机械
BEIQIANG MACHINERY

BEIQIANG

9000+m²
FACTORY AREA

70+
DISTRIBUTOR

120+
TOP-SELLING MARKETS

80+
TECHNICAL PATENTS



ABOUT US

Xingtai Beiqiang Machinery Manufacturing Plant is a professional-grade construction-machinery manufacturer supplying forklifts, aerial work platforms, excavators and more. We support ODM/ OEM customization with strict quality-controlled, durable, cost-effective equipment meeting international standards.

Our diesel material handling forklifts feature stable high-torque performance, consistent power delivery and low maintenance for heavy-duty operations across warehouses, docks, construction and mining sites. Supported by our professional international trade team and global logistics network, we provide one-stop procurement and worldwide export service to be your reliable business partner.

CPC15(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

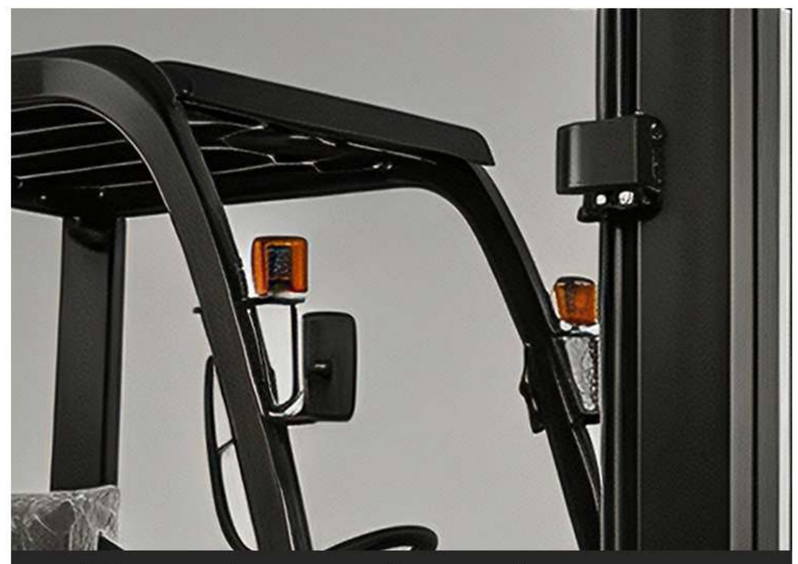

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.

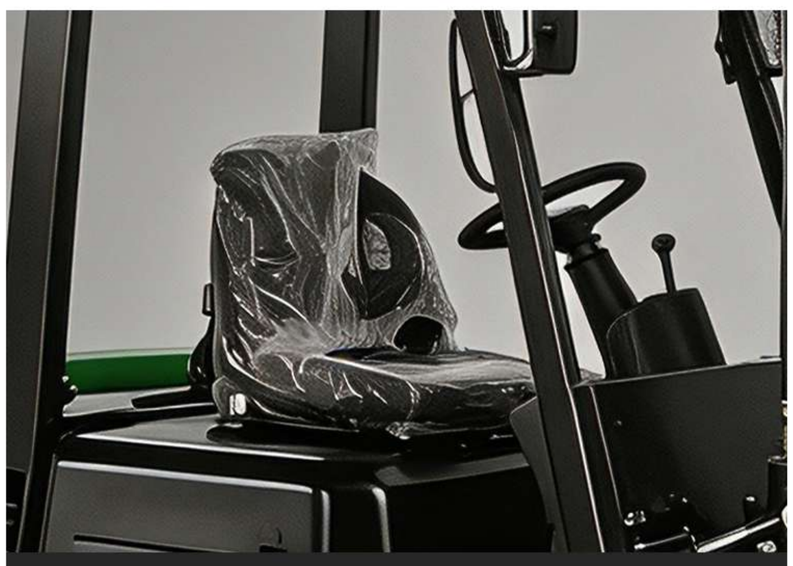

Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC15(Diesel Forklift)

■ Product Parameters

Model		CPC15
Rated lifting load	kg	1500
Load center distance	mm	500
Free lifting height	mm	100
overall length (Without fork)	mm	2400
Width	mm	1150
Overhead guard height	mm	2150
Wheelbase	mm	1400
Minimum ground clearance	mm	110
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		6.5-10-10PR
Tire no. (after)		5.00-8-1 OPR
Minimum turning radius (outer side)	mm	1950
Minimum right angle aisle width	mm	3630
Fork size	mm	1070
maximum working speed(Full-load/No-load)	km/h	14/15
maximum lifting speed(Full-load/No-load)	mm/s	500/480
maximum gradeability(Full-load/No-load)	%	20/21
Forklift weight	kg	3150
Engine model		XinChai C490 or 485 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC20(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features

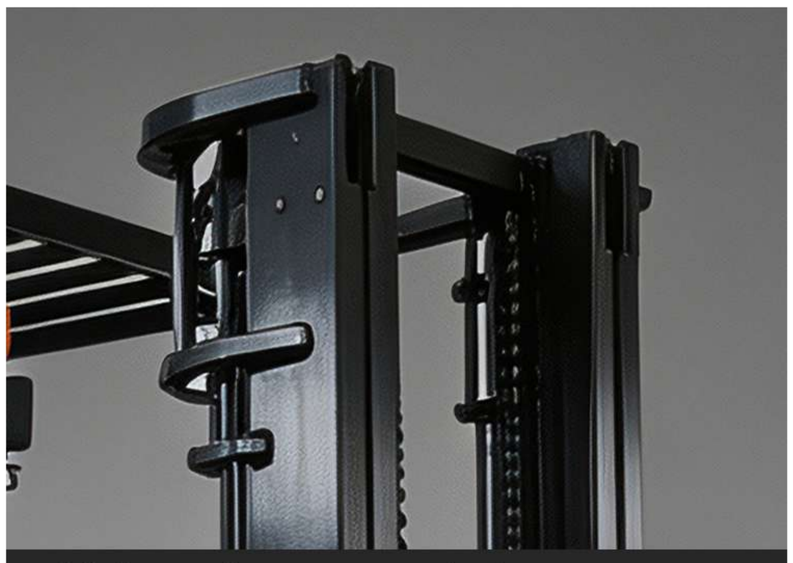

Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

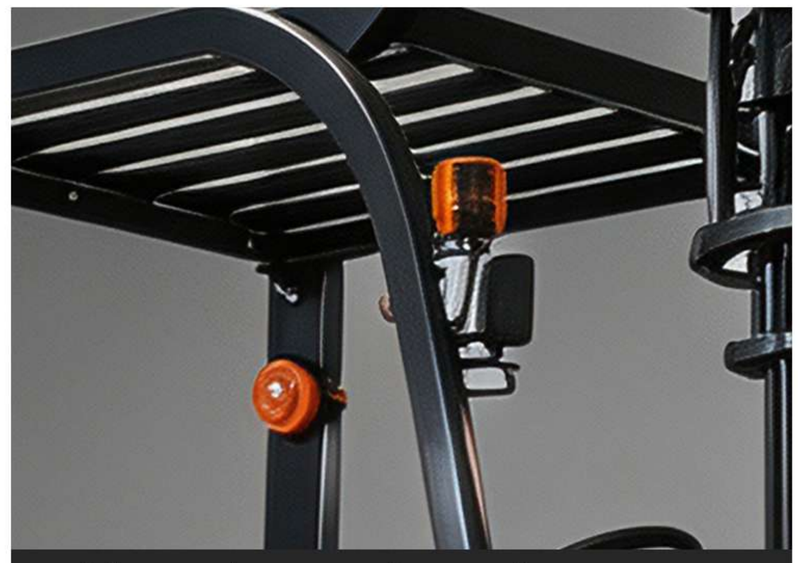

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC20(Diesel Forklift)

■ Product Parameters

Model		CPC20
Rated lifting load	kg	2000
Load center distance	mm	500
Free lifting height	mm	150
overall length (Without fork)	mm	2500
Width	mm	1170
Overhead guard height	mm	2150
Wheelbase	mm	1600
Minimum ground clearance	mm	110
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		7.00x12-12PR
Tire no. (after)		6.00x9-1OPR
Minimum turning radius (outer side)	mm	2170
Minimum right angle aisle width	mm	3900
Fork size	mm	1070
maximum working speed(Full-load/No-load)	km/h	17/19
maximum lifting speed(Full-load/No-load)	mm/s	530/550
maximum gradeability(Full-load/No-load)	%	20/21
Forklift weight	kg	3320
Engine model		Quanchai or Xinchai C490 engine, 40 kW (National Emission Standard II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC25(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

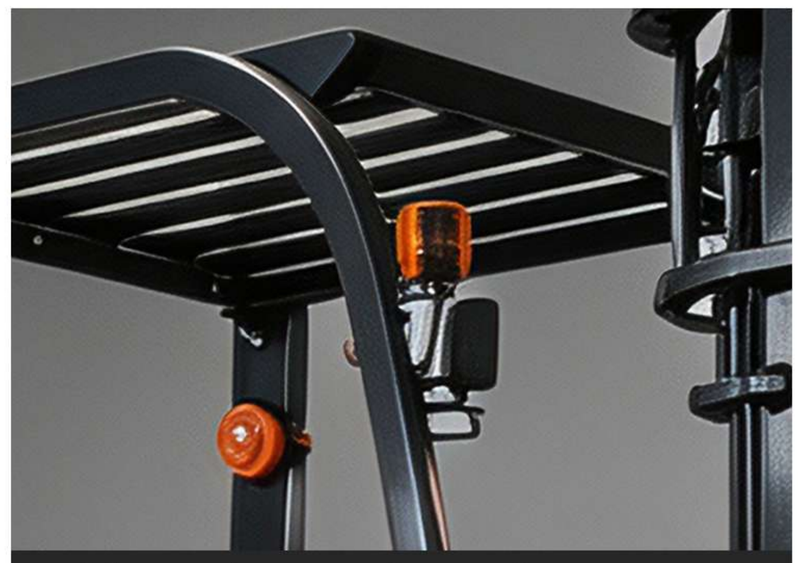

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.

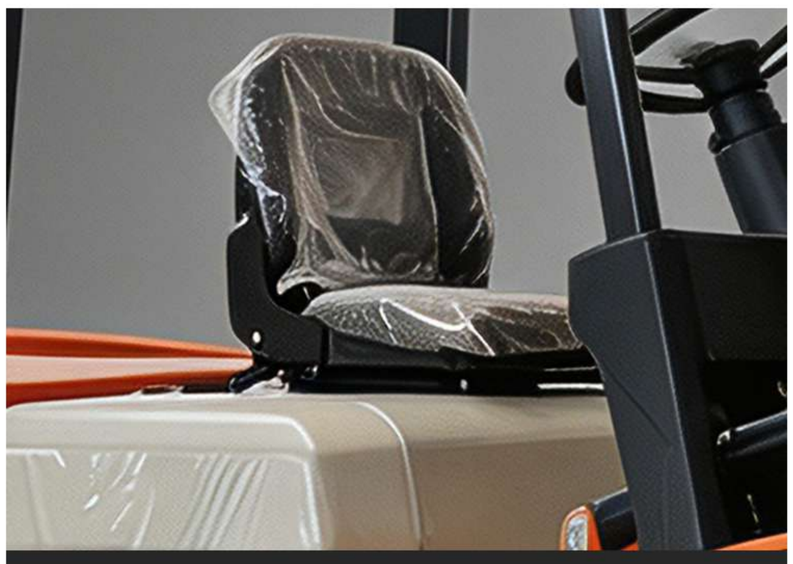

Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC25(Diesel Forklift)

■ Product Parameters

Model		CPC25
Rated lifting load	kg	2500
Load center distance	mm	500
Free lifting height	mm	150
overall length (Without fork)	mm	2576
Width	mm	1170
Overhead guard height	mm	2200
Wheelbase	mm	1600
Minimum ground clearance	mm	110
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		7.00x12-12PR
Tire no. (after)		6.00x9-1OPR
Minimum turning radius (outer side)	mm	2240
Minimum right angle aisle width	mm	3970
Fork size	mm	1070
maximum working speed(Full-load/No-load)	km/h	17/19
maximum lifting speed(Full-load/No-load)	mm/s	530/550
maximum gradeability(Full-load/No-load)	%	20/21
Forklift weight	kg	3680
Engine model		Quanchai or Xinchai C490 engine, 40 kW (National II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC30(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.

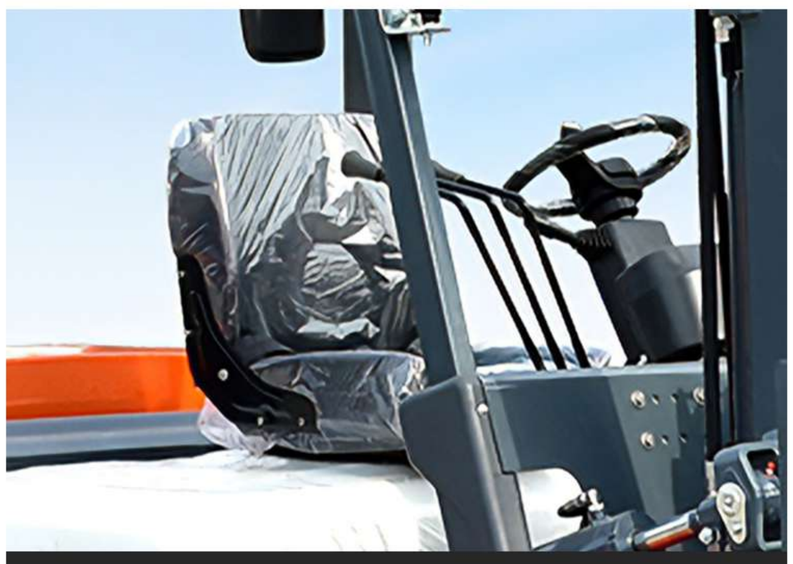

Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC30(Diesel Forklift)

■ Product Parameters

Model		CPC30
Rated lifting load	kg	3000
Load center distance	mm	500
Free lifting height	mm	160
overall length (Without fork)	mm	2682
Width	mm	1225
Overhead guard height	mm	2200
Wheelbase	mm	1700
Minimum ground clearance	mm	135
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		28x9-15-14PR
Tire no. (after)		6.5-10-1OPR
Minimum turning radius (outer side)	mm	2400
Minimum right angle aisle width	mm	4260
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	18/19
maximum lifting speed(Full-load/No-load)	mm/s	440/480
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	4150
Engine model		Quanchai or Xinchai C490 engine, 40 kW (National II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC35(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.

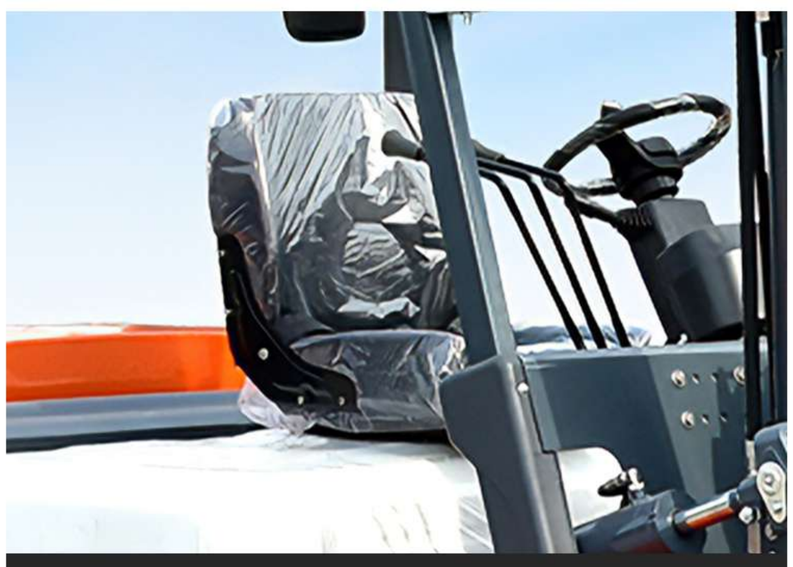

Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC35(Diesel Forklift)

■ Product Parameters

Model		CPC35
Rated lifting load	kg	3500
Load center distance	mm	500
Free lifting height	mm	160
overall length (Without fork)	mm	2693
Width	mm	1225
Overhead guard height	mm	2200
Wheelbase	mm	1700
Minimum ground clearance	mm	135
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		28x9-15-14PR
Tire no. (after)		6.5-10-1OPR
Minimum turning radius (outer side)	mm	2420
Minimum right angle aisle width	mm	4260
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	19/19
maximum lifting speed(Full-load/No-load)	mm/s	330/370
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	4500
Engine model		Quanchai or Xinchai C490 engine, 40 kW (National II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC40(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC40(Diesel Forklift)

■ Product Parameters

Model		CPC40
Rated lifting load	kg	4000
Load center distance	mm	500
Free lifting height	mm	150
overall length (Without fork)	mm	2930
Width	mm	1300
Overhead guard height	mm	2200
Wheelbase	mm	1900
Minimum ground clearance	mm	140
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		250-15-16PR
Tire no. (after)		7.00-12-12PR
Minimum turning radius (outer side)	mm	2710
Minimum right angle aisle width	mm	4750
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	19/19
maximum lifting speed(Full-load/No-load)	mm/s	340/380
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	4950
Engine model		XinChai A495 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC45(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC45(Diesel Forklift)

■ Product Parameters

Model		CPC45
Rated lifting load	kg	4500
Load center distance	mm	500
Free lifting height	mm	150
overall length (Without fork)	mm	3000
Width	mm	1350
Overhead guard height	mm	2500
Wheelbase	mm	1900
Minimum ground clearance	mm	150
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		300-15-20PR
Tire no. (after)		7.00-12-12PR
Minimum turning radius (outer side)	mm	2820
Minimum right angle aisle width	mm	4830
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	18/19
maximum lifting speed(Full-load/No-load)	mm/s	420/460
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	5500
Engine model		XinChai A498 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPC50(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

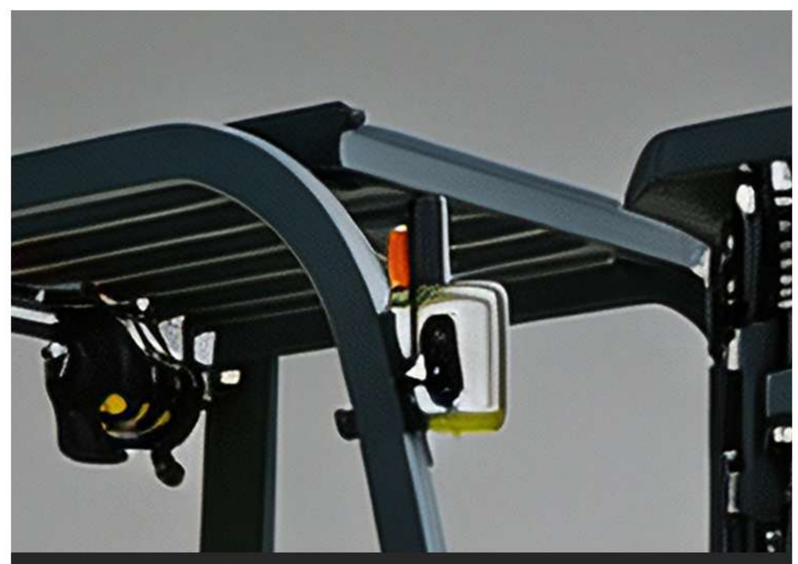

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPC50(Diesel Forklift)

■ Product Parameters

Model		CPC50
Rated lifting load	kg	5000
Load center distance	mm	500
Free lifting height	mm	160
overall length (Without fork)	mm	3120
Width	mm	1480
Overhead guard height	mm	2500
Wheelbase	mm	2000
Minimum ground clearance	mm	175
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		300-15-20PR
Tire no. (after)		7.00-12-12PR
Minimum turning radius (outer side)	mm	2900
Minimum right angle aisle width	mm	4960
Fork size	mm	1070
maximum working speed(Full-load/No-load)	km/h	18/19
maximum lifting speed(Full-load/No-load)	mm/s	400/380
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	6700
Engine model		National III Quanchai 4C6 or New Chai 4D35G Engine

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPCD50(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Wide-view Overhead Guard

Reinforced protective roof with hollow design, wide vision for safe operation.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPCD50(Diesel Forklift)

■ Product Parameters

Model		CPCD50
Rated lifting load	kg	5000
Load center distance	mm	600
Free lifting height	mm	210
overall length (Without fork)	mm	3510
Width	mm	1970
Overhead guard height	mm	2500
Wheelbase	mm	2250
Minimum ground clearance	mm	230
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		8.25-15-14PR
Tire no. (after)		8.25-15-14PR
Minimum turning radius (outer side)	mm	4080
Minimum right angle aisle width	mm	5230
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	24/29
maximum lifting speed(Full-load/No-load)	mm/s	510/530
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	8400
Engine model		Xichai CA6110 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPCD60(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障



Features

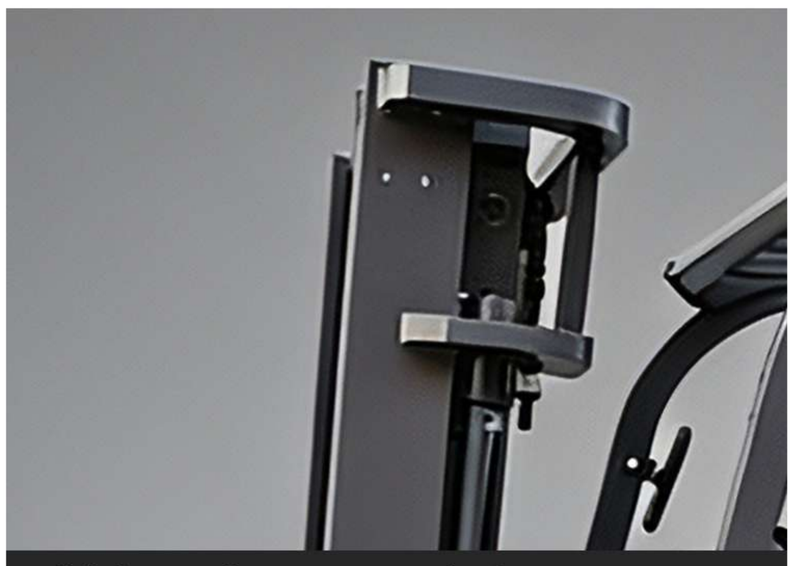

Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Anti-slip Foot Pedal

Textured pedal for safer boarding.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPCD60(Diesel Forklift)

■ Product Parameters

Model		CPCD60
Rated lifting load	kg	6000
Load center distance	mm	600
Free lifting height	mm	210
overall length (Without fork)	mm	3590
Width	mm	1970
Overhead guard height	mm	2500
Wheelbase	mm	2250
Minimum ground clearance	mm	230
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		8.25-15-14PR
Tire no. (after)		8.25-15-14PR
Minimum turning radius (outer side)	mm	4120
Minimum right angle aisle width	mm	5290
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	23/29
maximum lifting speed(Full-load/No-load)	mm/s	500/530
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	8900
Engine model		Xichai CA6110 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPCD70(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障



Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.



Heavy-duty Chassis

Integrated thick frame, solid structure and high whole-machine stability.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Wide-view Overhead Guard

1. Reinforced protective roof with hollow design, wide vision for safe operation..

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPCD70(Diesel Forklift)

■ Product Parameters

Model		CPCD70
Rated lifting load	kg	7000
Load center distance	mm	600
Free lifting height	mm	210
overall length (Without fork)	mm	3680
Width	mm	1970
Overhead guard height	mm	2500
Wheelbase	mm	2250
Minimum ground clearance	mm	230
Mast tilt angle (front/rear)	%	6° /12°
Tire no. (before)		8.25-15-14PR
Tire no. (after)		8.25-15-14PR
Minimum turning radius (outer side)	mm	4180
Minimum right angle aisle width	mm	5360
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	22/29
maximum lifting speed(Full-load/No-load)	mm/s	500/480
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	9600
Engine model		Xichai CA6110 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPCD80(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features

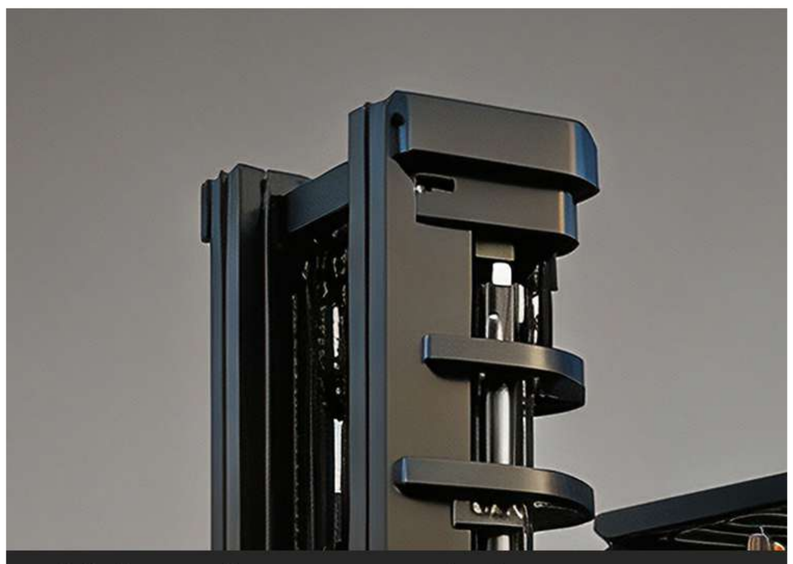

Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

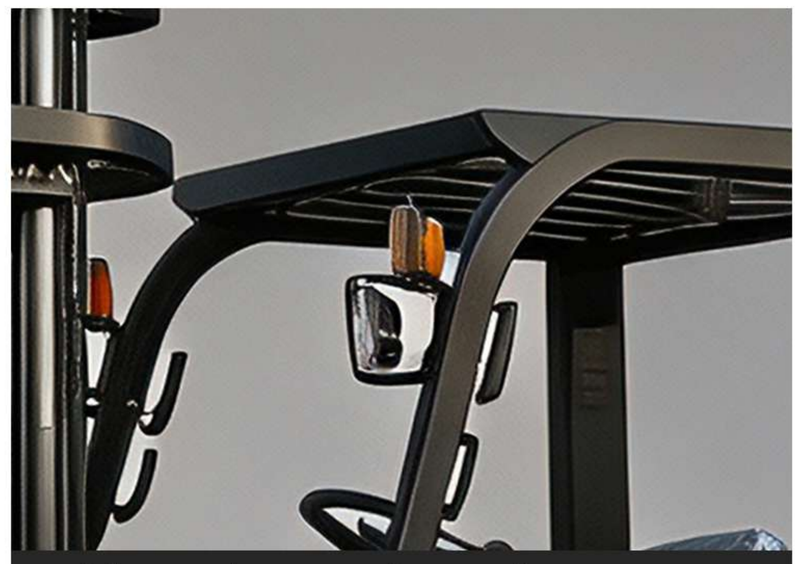

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Wide-view Overhead Guard

Reinforced protective roof with hollow design, wide vision for safe operation.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPCD80(Diesel Forklift)

■ Product Parameters

Model		CPCD80
Rated lifting load	kg	8000
Load center distance	mm	600
Free lifting height	mm	200
overall length (Without fork)	mm	3830
Width	mm	2100
Overhead guard height	mm	2550
Wheelbase	mm	2800
Minimum ground clearance	mm	250
Mast tilt angle (front/rear)	%	10° /12°
Tire no. (before)		9.00-20NHS
Tire no. (after)		9.00-20NHS
Minimum turning radius (outer side)	mm	3755
Minimum right angle aisle width	mm	5755
Fork size	mm	1220
maximum working speed(Full-load/No-load)	km/h	20/26
maximum lifting speed(Full-load/No-load)	mm/s	330/350
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	10800
Engine model		Xichai CA6110 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

CPCD100(Diesel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Thickened Mast Steel Plate

High-strength steel, resistant to deformation under load.



Wear-resistant Solid Tires

Puncture-proof, longer service life on rough ground.

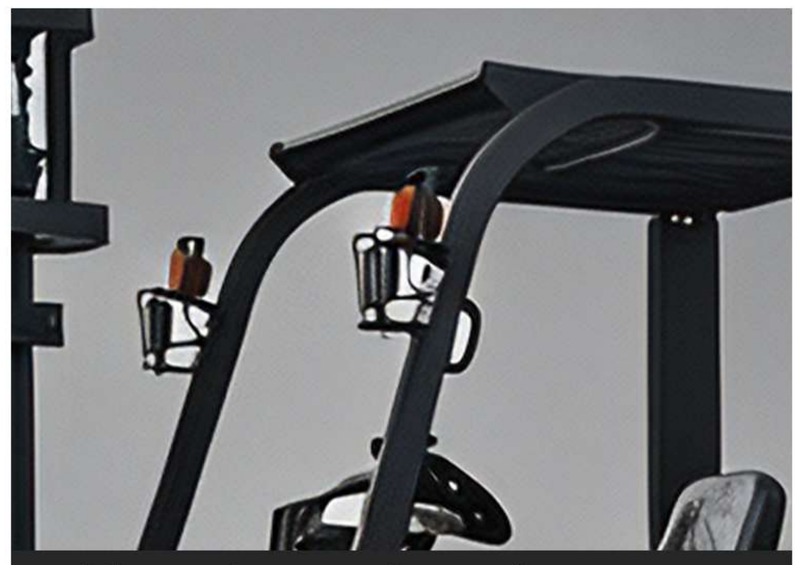

Wide-angle Rearview Mirrors

Dual side mirrors to reduce blind spots.



Shock-absorbing Seat

Ease vibration fatigue during long shifts.



Anti-rust Coated Body

Multi-layer paint, anti-corrosion for outdoor use.



Wide-view Overhead Guard

Reinforced protective roof with hollow design, wide vision for safe operation.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

CPCD100(Diesel Forklift)

■ Product Parameters

Model		CPCD100
Rated lifting load	kg	10000
Load center distance	mm	600
Free lifting height	mm	200
overall length (Without fork)	mm	4277
Width	mm	2250
Overhead guard height	mm	2600
Wheelbase	mm	2800
Minimum ground clearance	mm	250
Mast tilt angle (front/rear)	%	10° /12°
Tire no. (before)		9.00-20NHS
Tire no. (after)		9.00-20NHS
Minimum turning radius (outer side)	mm	4150
Minimum right angle aisle width	mm	6010
Fork size	mm	1520
maximum working speed(Full-load/No-load)	km/h	20/26
maximum lifting speed(Full-load/No-load)	mm/s	330/350
maximum gradeability(Full-load/No-load)	%	15/20
Forklift weight	kg	12410
Engine model		Xichai CA6110 Engine (China II)

Remarks: The above parameters are for reference only and minor discrepancies may occur.

北强机械
BEIQIANG MACHINERY

Beiqiang Heavy Industry, Top-tier Intelligent Manufacturing



















BEIQIANG

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

邢台北强机械制造厂

地址:河北省邢台市任泽区邢湾镇工业区

网址:https://www.bq-forklift.com