BEIQIANG

BEIQIANG

FORKLIFT SPECIALISTS

Integrity | Professionalism | Quality | Innovation

Promotion of Mechanical Technology, Sales of Complete Machinery and Parts, and Technical Consulting

PROFESSIONAL
RELIABLE
INNOVATIVE



Xingtai Beiqiang Machinery Manufacturing Factory

YOUR TRUSTED PARTNER
IN MATERIAL HANDLING SOLUTIONS

www.bq-forklift.com

北强机械
BEIQIANG MACHINERY

BEIQIANG

9000+m²
FACTORY AREA

70+
DISTRIBUTOR

120+
TOP-SELLING MARKETS

80+
TECHNICAL PATENTS



ABOUT US

Xingtai Beiqiang Machinery Manufacturing Plant is a professional-grade construction-machinery manufacturer supplying forklifts, aerial work platforms, excavators and more. We support ODM/ OEM customization with strict quality-controlled, durable, cost-effective equipment meeting international standards.

Our electric-powered material-handling machinery delivers stable high-torque performance, long -lasting battery life and low-maintenance clean-efficiency for heavy-duty work in warehouses, docks, construction and mining sites. Backed by our expert international-trade team and global-logistics network, we offer one-stop procurement and worldwide-export service as your trusted business partner.

CONTENTS

CHAPTER 01 3-Wheel Forklift 1

CPD0.5T(3-Wheel Forklift)·····1
CPD0.8T(3-Wheel Forklift)·····3
CPD1T(3-Wheel Forklift)·····5
CPD1.5T(3-Wheel Forklift)·····7
CPD2T(3-Wheel Forklift)·····9

CHAPTER 02 4-Wheel Forklift 11

CPD10(4-Wheel Forklift)·····11
CPD15(4-Wheel Forklift)·····13
CPD20(4-Wheel Forklift)·····15
CPD25(4-Wheel Forklift)·····17
CPD30(4-Wheel Forklift)·····19
CPD35(4-Wheel Forklift)·····21
CPD40(4-Wheel Forklift)·····23

CHAPTER 03 Pallet Jack 25

1.5T(Walkie Stacker)·····25
2T(Walkie Stacker)·····27
1.5T(Stand-On Stacker)·····29
2T(Stand-On Stacker)·····31
1.5T(Double Lift Stacker)·····33
2T(Double Lift Stacker)·····35
1.5T(Rough Terrain Stacker)·····37
2T(Rough Terrain Stacker)·····39
1.5T(Electric Reach Stacker)·····41
2T(Electric Reach Stacker)·····43
1.5T(Counterbalanced Stacker)·····45
2T(Counterbalanced Stacker)·····47

CHAPTER 04 Earth Ox 49

3T(Semi-Electric Hand Pallet Truck·····49
3T(Full Electric Pallet Truck)·····51
3T(Large-Wheel Semi-Electric Pallet Truck)·····53
3T(Large-Wheel All-Electric)·····55
3T(Off-Road "King Kong" Model)·····57
3T(Small Wheel Vajra Style)·····59
3T(Bull King All-Electric)·····61
5T(All-Electric SUV)·····63
Manual Pallet Truck·····65

CHAPTER 05 Product advantage 67

Product advantage·····67

CPD0.5T(3-Wheel Forklift)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.



Steering wheel

User-friendly controls forprecise handling andgreater efficiency.

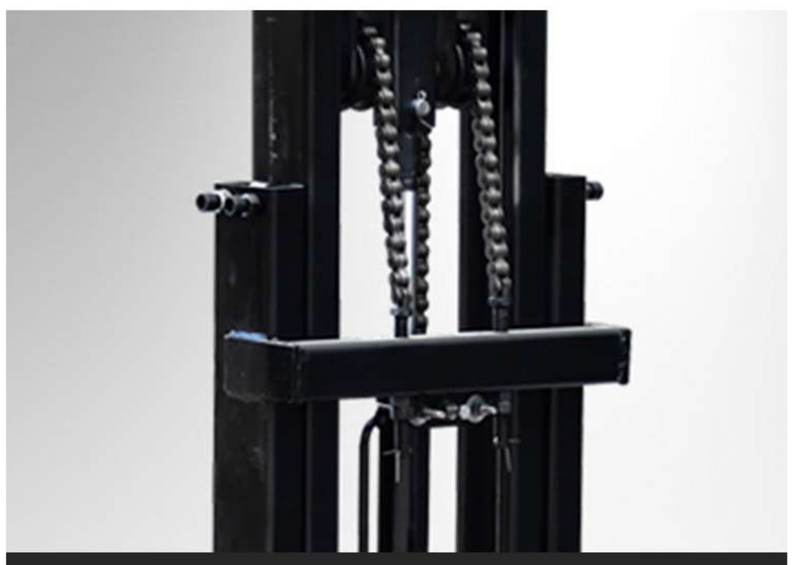

Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Specificities

Rear-pivot rotation, small turning radius for narrow -space work.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD0.5T(3-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	1.2kw brushless AC motor
Voltage	48v
Controller	Fuzhou Xinlianda
battery	5 Chaowei dry batteries (48V/ 45ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	1.2kw brushless AC motor
Gantry frame material	150mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Handbrake brake, oil brake
Drive axle	Fully suspended cast steelone-piece 310 bridge
Maximum lifting weight	500kg

long	1500mm without fork
long	2500mm containing fork
wide	800mm
high	1650MM
Total vehicle weight	800kg
Tires	Front tires: 400-10(Class A high-wear solid tires); rear tires: 300/ 100(Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	2000mm

■ Load-Displacement Curve

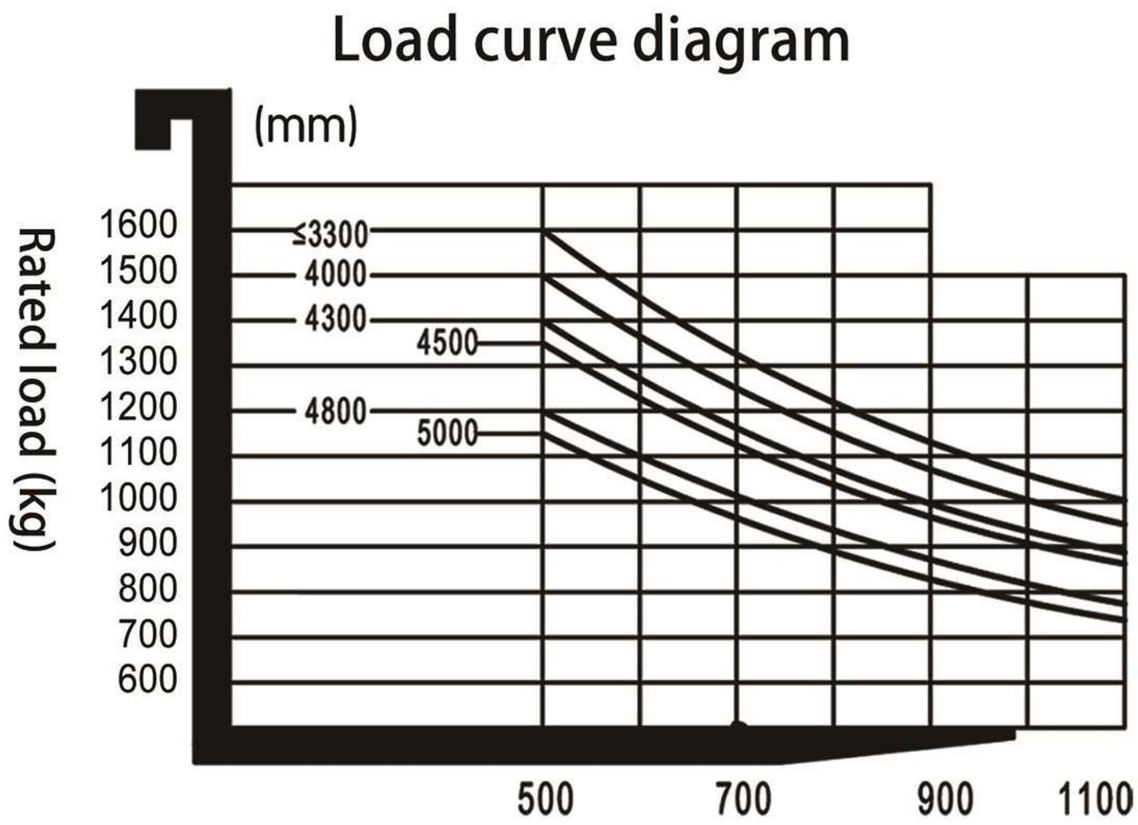

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD0.8T(3-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

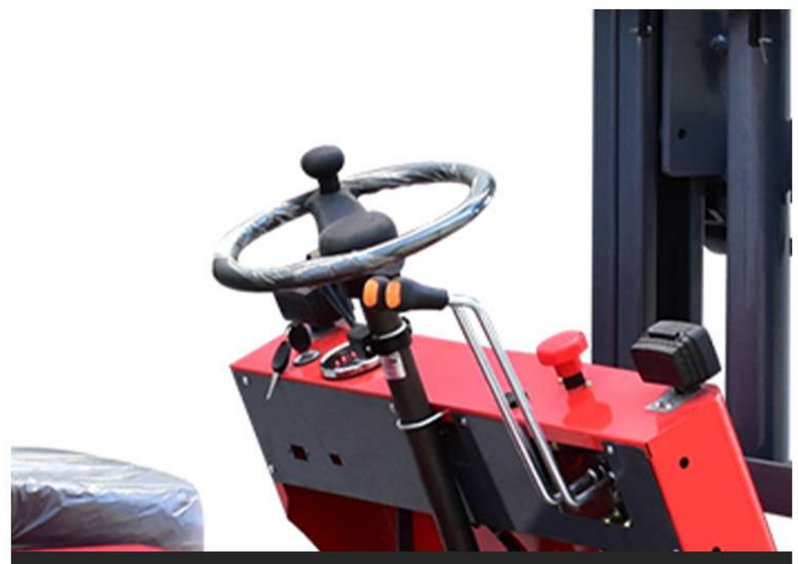

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.

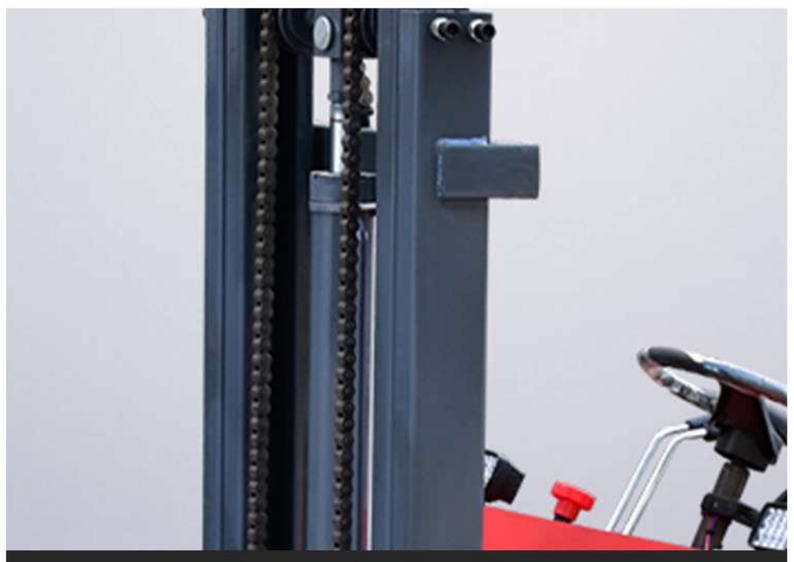

Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Specificities

Rear-pivot rotation, small turning radius for narrow -space work.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD0.8T(3-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	2.2kw brushless AC motor
Voltage	48v
Controller	Fuzhou Xinlianda
battery	4 Chaowei dry batteries (48V/ 52ah)
Lights and Signals	Floodlights
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	1.5kw brushless AC motor
Gantry frame material	106mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Handbrake brake
Drive axle	Fully suspended cast steelone-piece 216 bridge
Maximum lifting weight	800kg

long	1600mm without fork
long	2600mm containing fork
wide	900mm
high	1650MM
Total vehicle weight	1100kg
Tires	Front tires: 400-10(Class A high-wear solid tires); rear tires: 300/ 100(Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	2000mm

■ Load-Displacement Curve

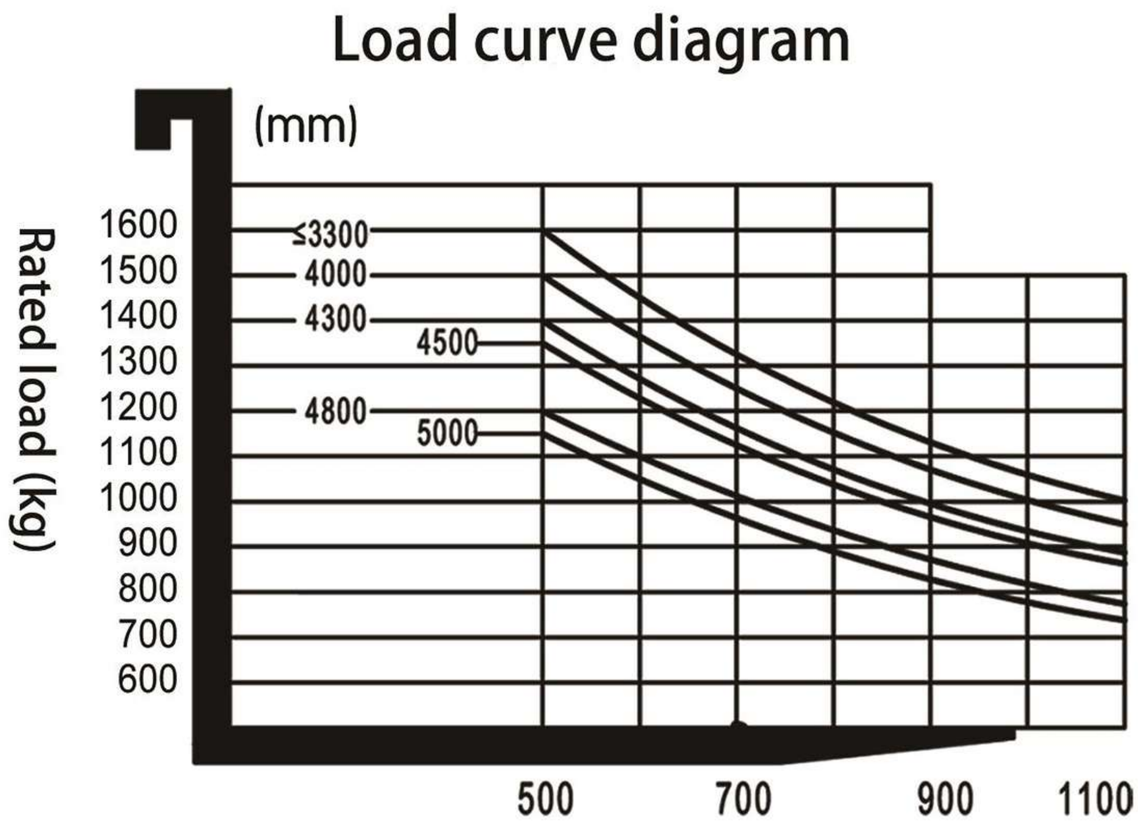

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD1T(3-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.



Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Specificities

Rear-pivot rotation, small turning radius for narrow -space work.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD1T(3-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	2.2kw brushless AC motor
Voltage	48v
Controller	Fuzhou Xinlianda
battery	4 Chaowei dry batteries (48V/ 52ah)
Lights and Signals	Floodlights
Lift the cylinder	High-Precision Machined Air-Worn Casing, Single-Directional, Single-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	1.2kw brushless AC motor
Gantry frame material	100mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	1700mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Handbrake brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	1000kg

long	1700mm without fork
long	2700mm containing fork
wide	900mm
high	1650MM
Total vehicle weight	800kg
Tires	Front tires: 400-10(Class A high-wear solid tires); rear tires: 300/ 100(Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	2000mm

■ Load-Displacement Curve

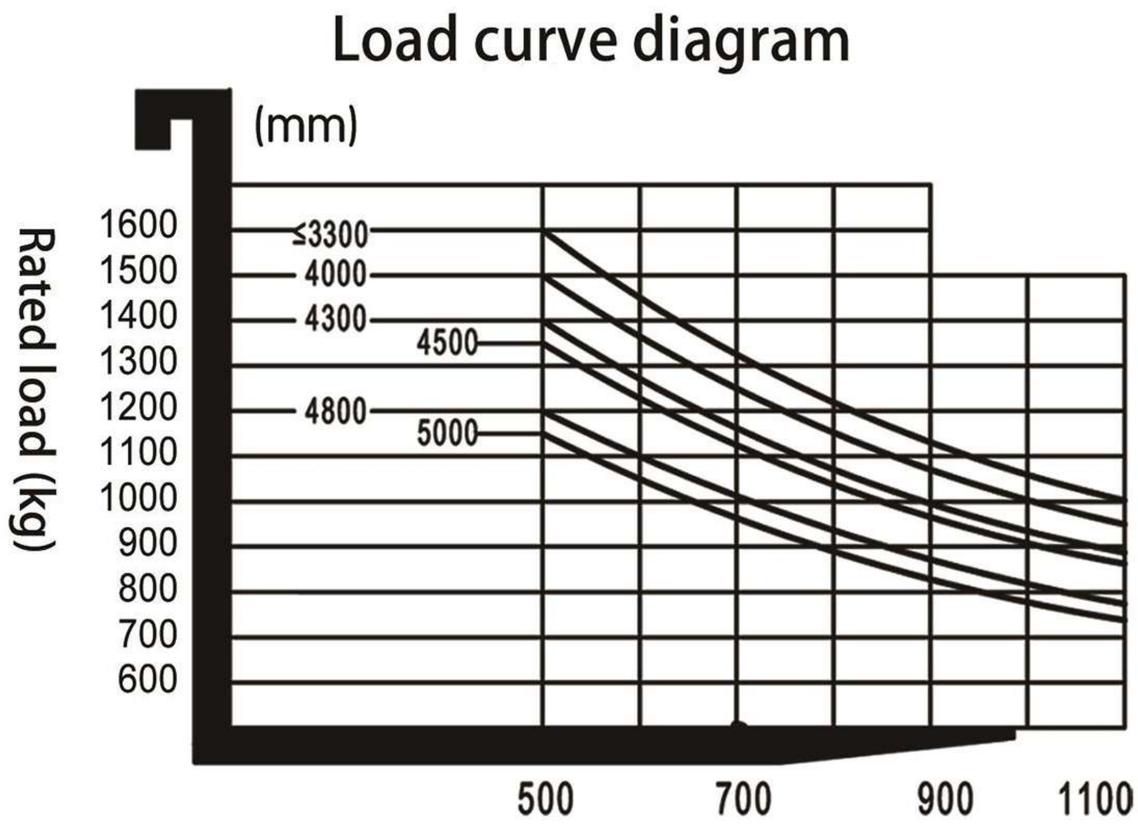

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD1.5T(3-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

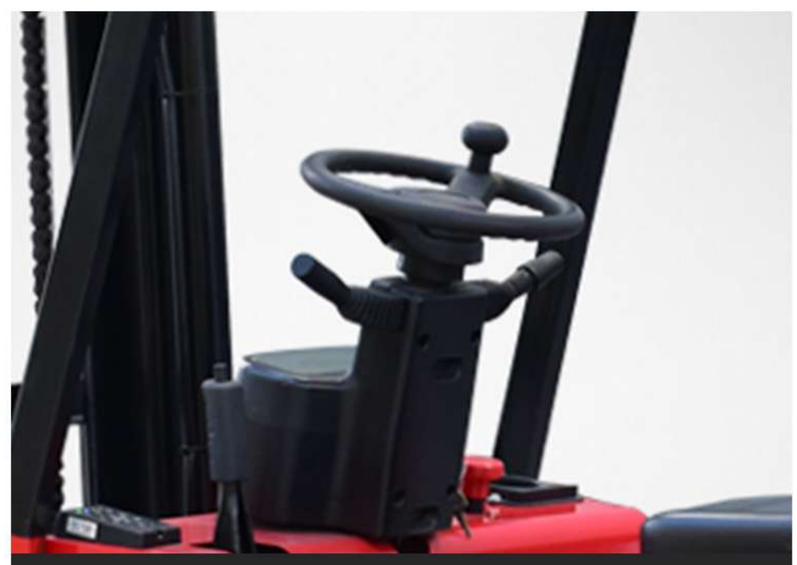

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.

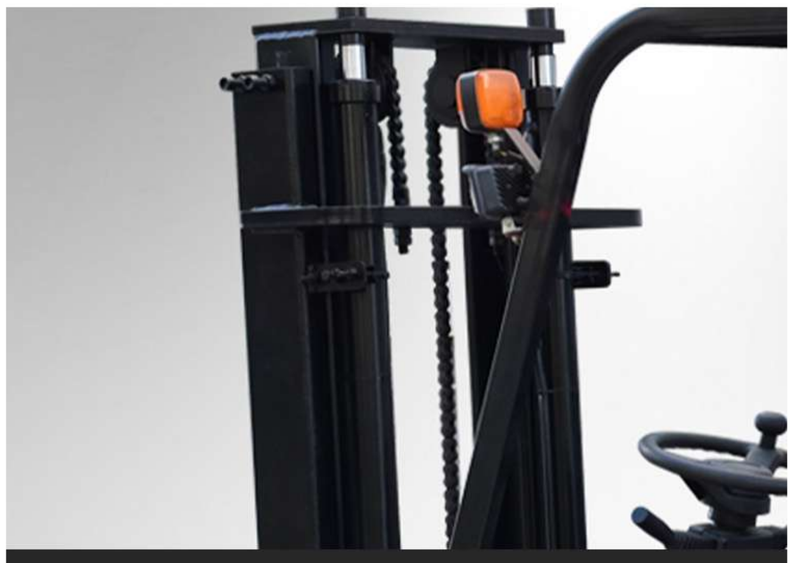

Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Specificities

Rear-pivot rotation, small turning radius for narrow -space work.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD1.5T(3-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	3kw brushless AC motor
Voltage	48v
Controller	Fuzhou Xinlianda
battery	4 Chaowei dry batteries (48V/ 52ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	2.5kw brushless AC motor
Gantry frame material	100mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	1850mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	1500kg

long	1850mm without fork
long	2850mm containing fork
wide	1050mm
high	1650MM
Total vehicle weight	1800kg
Tires	Front tires: 500-8(Class A high-wear solid tires); rear tires: 300/ 10(Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	2000mm

■ Load-Displacement Curve

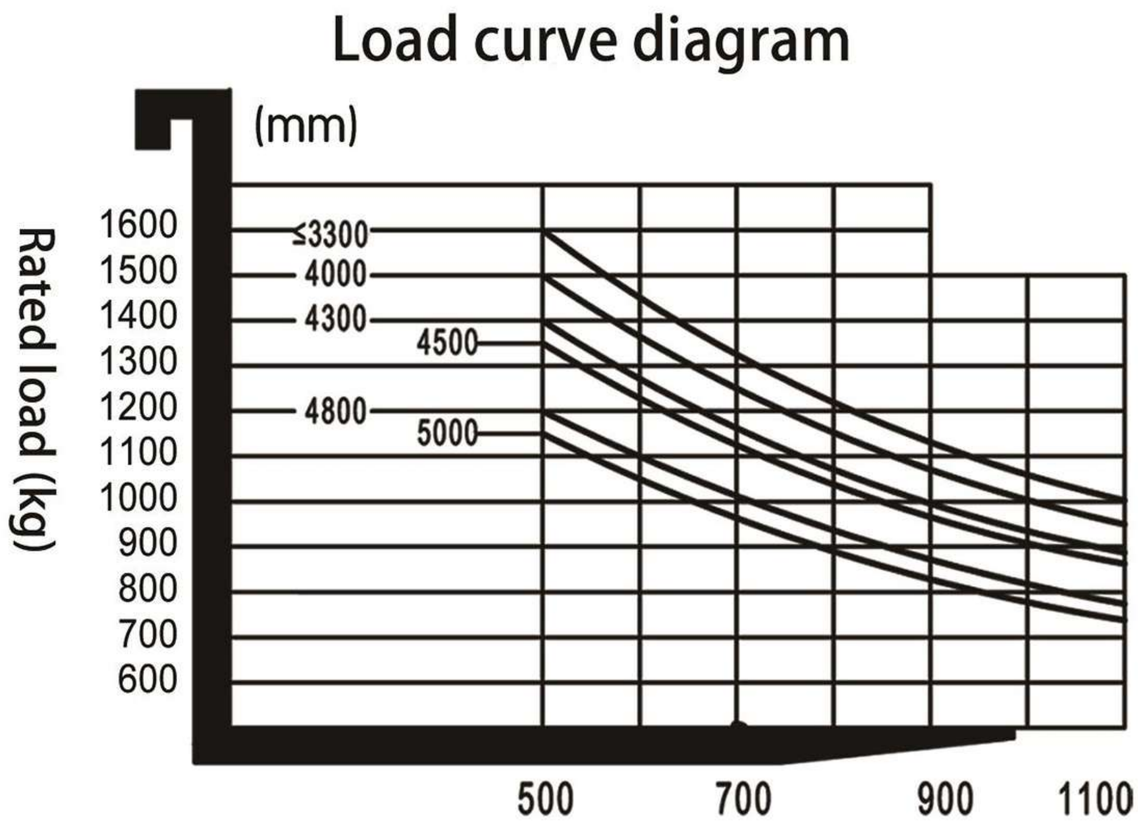

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD2T(3-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

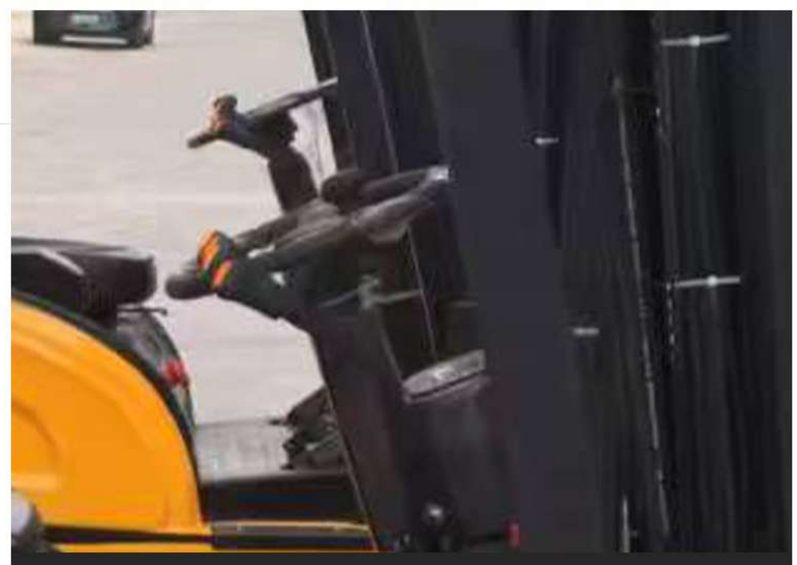

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.

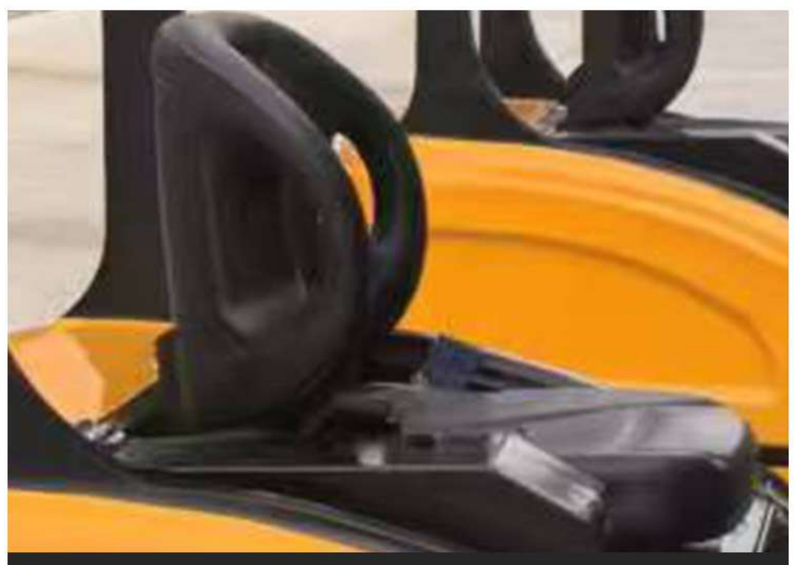

High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Specificities

Rear-pivot rotation, small turning radius for narrow -space work.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD2T(3-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	5kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	10 Chaowei dry batteries (60V/ 70ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	4kw brushless AC motor
Gantry frame material	120mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2200mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	1000kg

long	2200mm without fork
long	3270mm containing fork
wide	1180mm
high	2150MM
Total vehicle weight	2500kg
Tires	Front tires: 18*7-8(Class A high-wear solid tires); rear tires: 400-10(Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	2000mm

■ Load-Displacement Curve

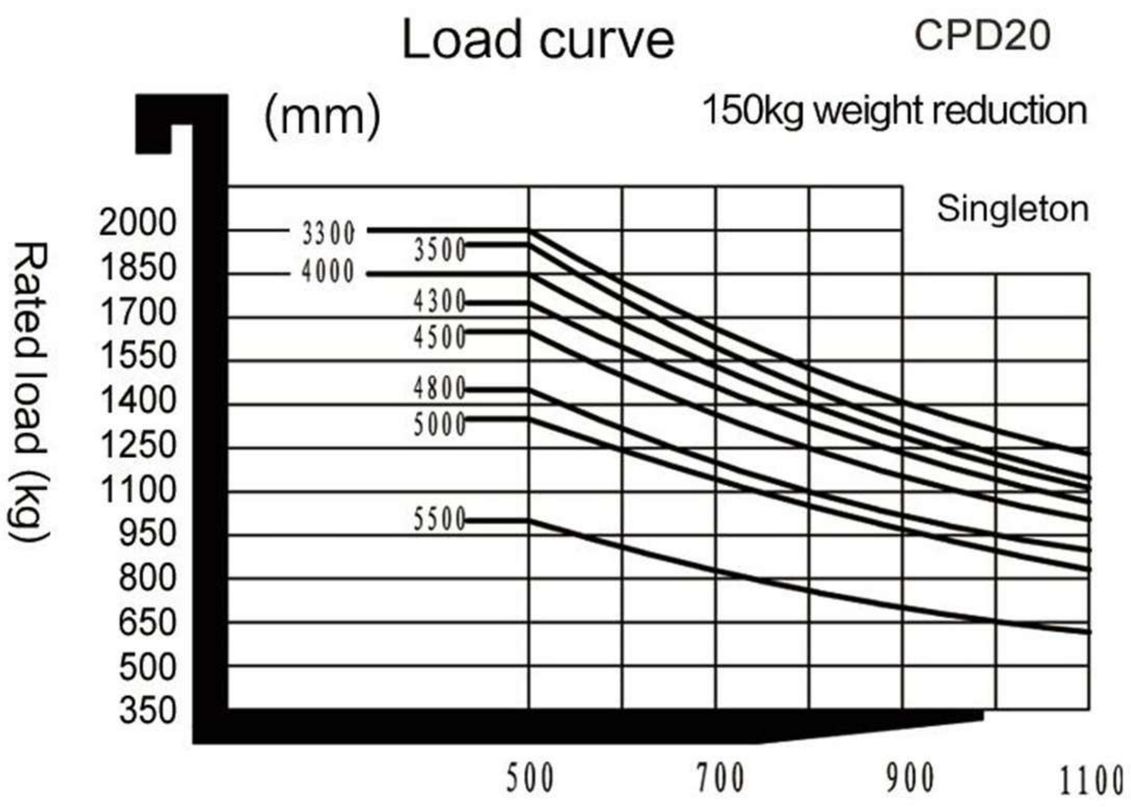

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD10(4-Wheel Forklift)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features

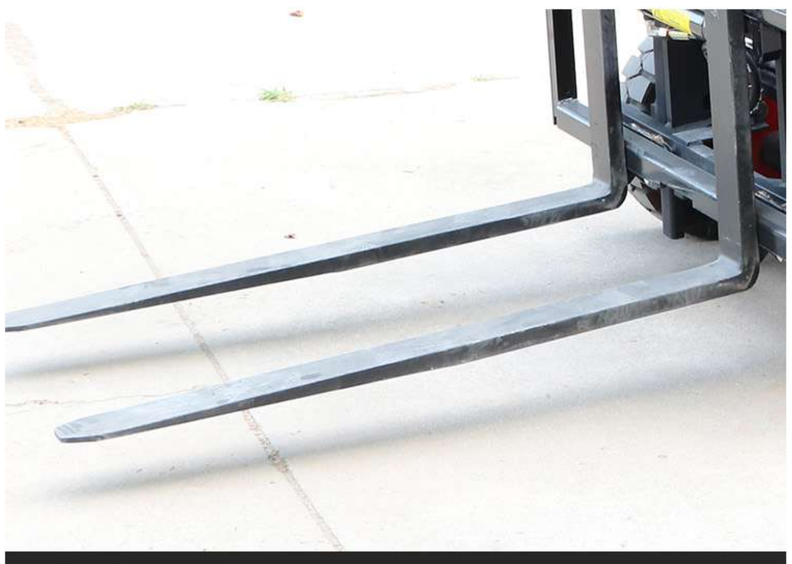

Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

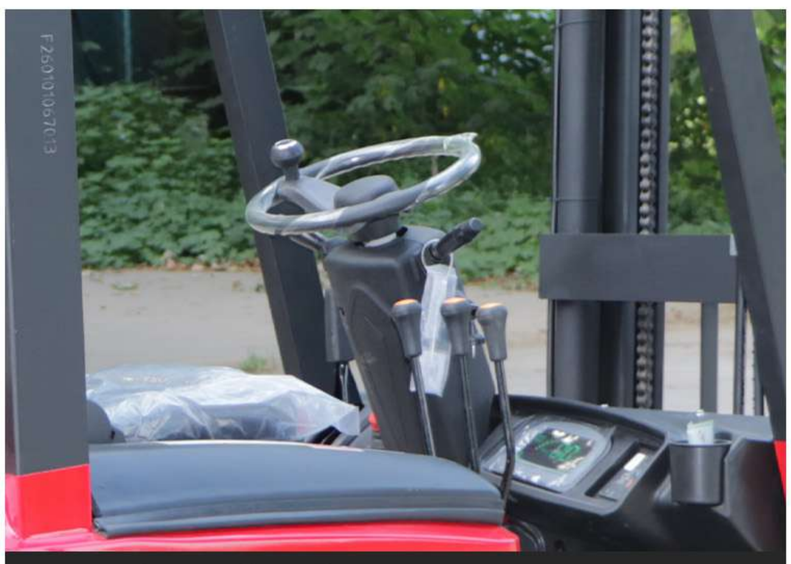

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.

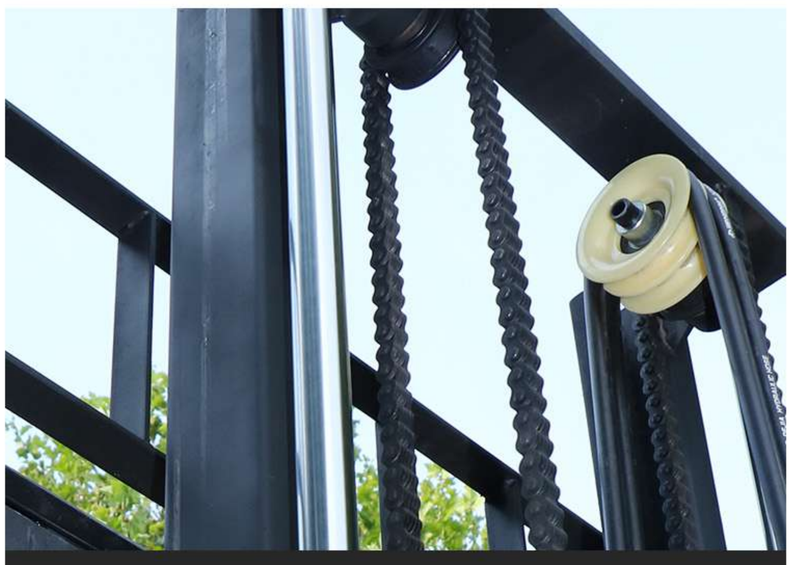

Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD10(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	2.5kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	5 Chaowei dry batteries (60V/ 70ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customized
Hvdraulic lift motor	2.2kw brushless AC motor
Gantry frame material	100mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	1000kg

long	2000mm without fork
long	3070mm containing fork
wide	1200mm
high	2150MM
Total vehicle weight	1700kg
Tires	Front tires: 500-8(Class A high-wear solid tires); rear tires: 400-8 (Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

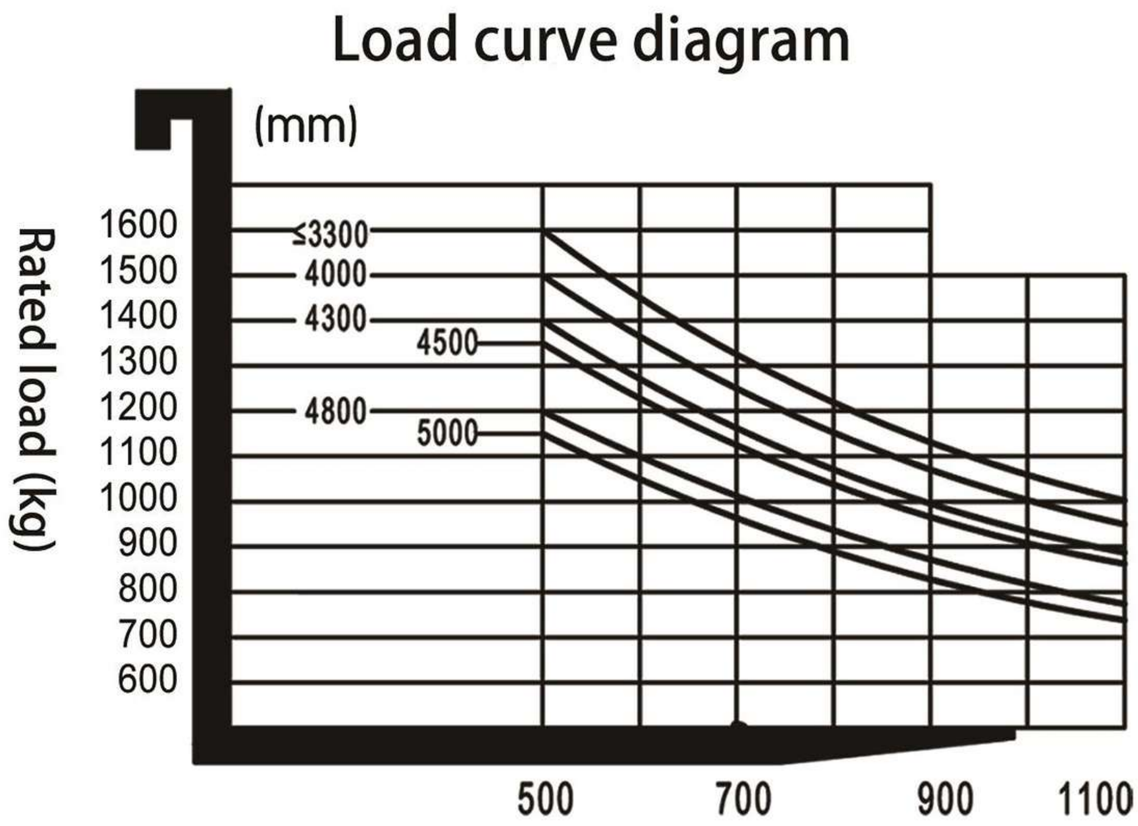

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD15(4-Wheel Forklift)

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

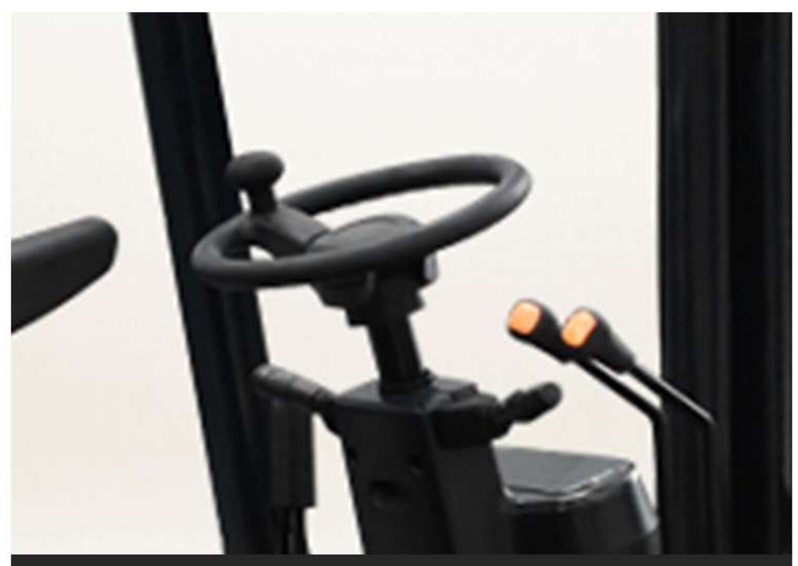

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.

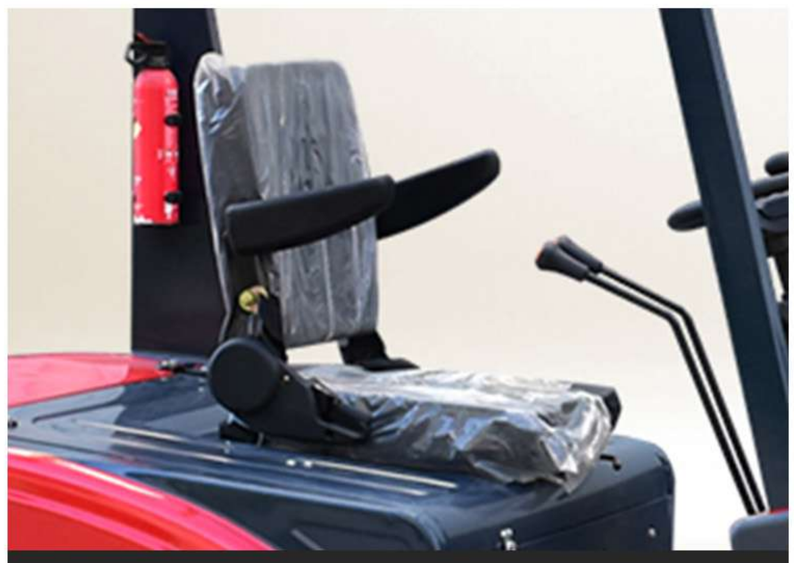

High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD15(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	4kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	5 Chaowei dry batteries (60V/ 200ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	1070mm - body forged fork
Hvdraulic lift motor	2.5kw brushless AC motor
Gantry frame material	150mm special steel doorframe
Steering mode	hydraulic power steering
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	1500kg

long	2150mm without fork
long	3220mm containing fork
wide	1200mm
high	2150MM
Total vehicle weight	2100kg
Tires	Front tires: 650-10(Class A high-wear solid tires); rear tires: 500-8 (Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

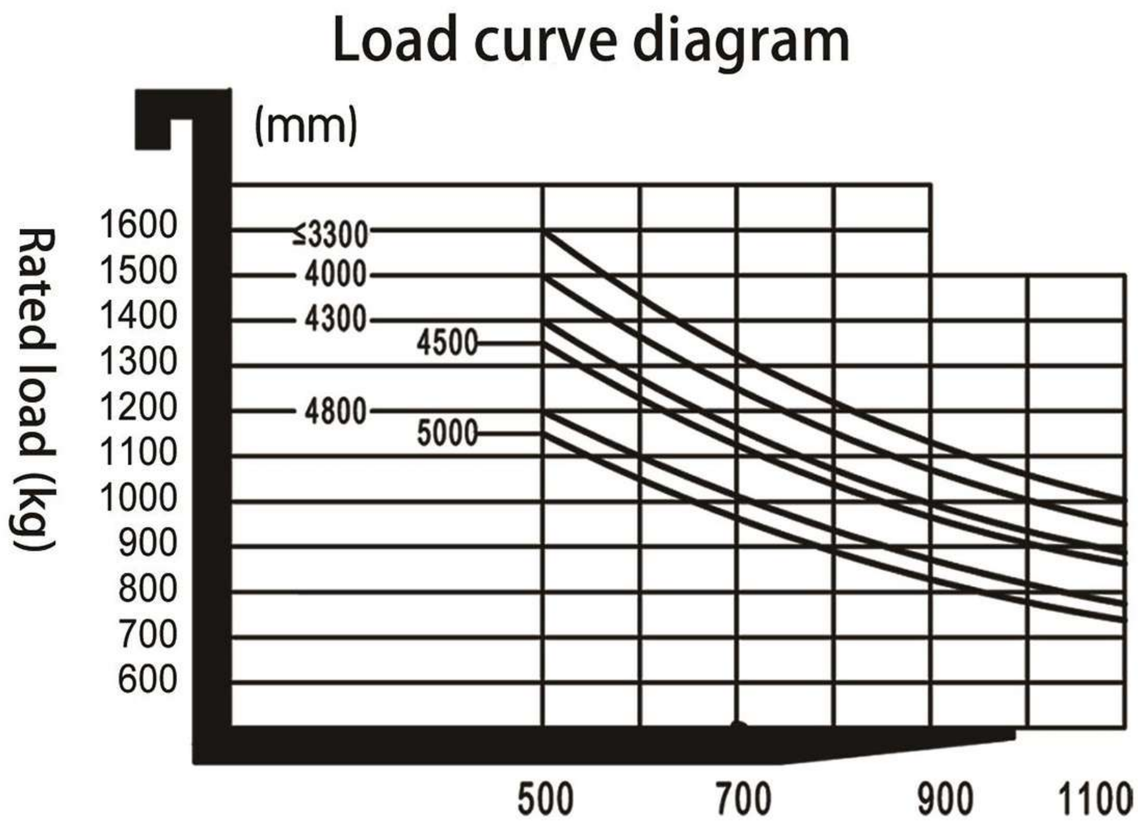

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD20(4-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features

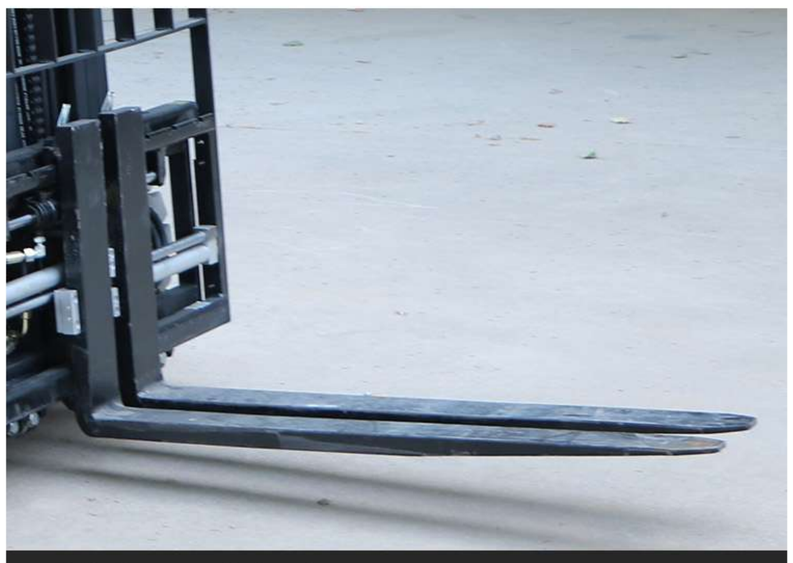

Thickened fork

Special steel, high load-capacity, non-deformable.

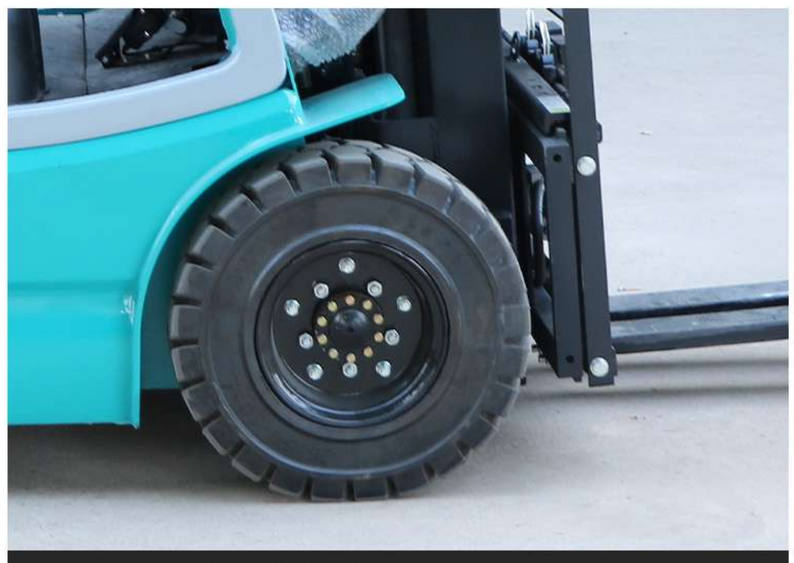

Standard solid tires

Solid tires avoid blowouts, improve work efficiency.



Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD20(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	4kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	10 Chaowei dry batteries (60V/ 140ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	1220mm - body forged fork
Hvdraulic lift motor	3kw brushless AC motor
Gantry frame material	150mm special steel doorframe
Steering mode	hydraulic power steering
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	2000kg

long	2400mm without fork
long	3620mm containing fork
wide	1200mm
high	2150MM
Total vehicle weight	2700kg
Tires	Front tires: 650-10(Class A high-wear solid tires); rear tires: 500-8 (Class A high-wear solid tires)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

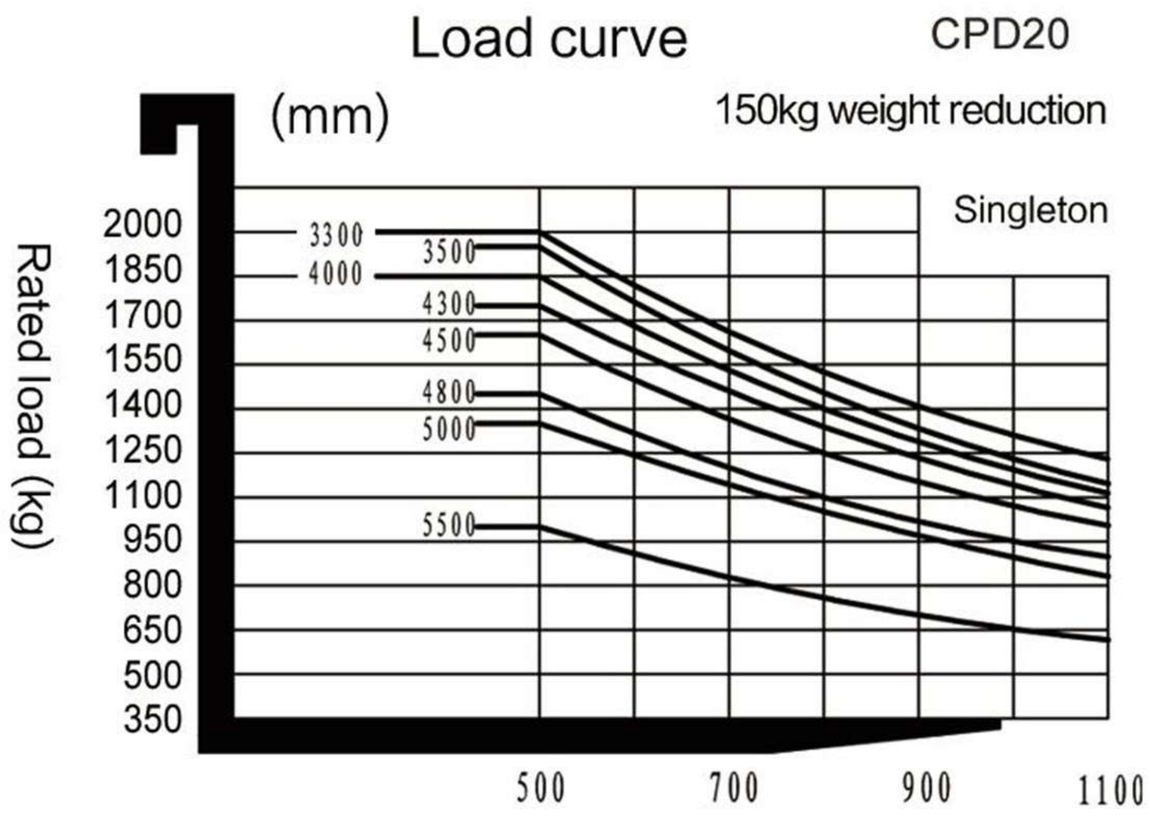

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD25(4-Wheel Forklift)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features

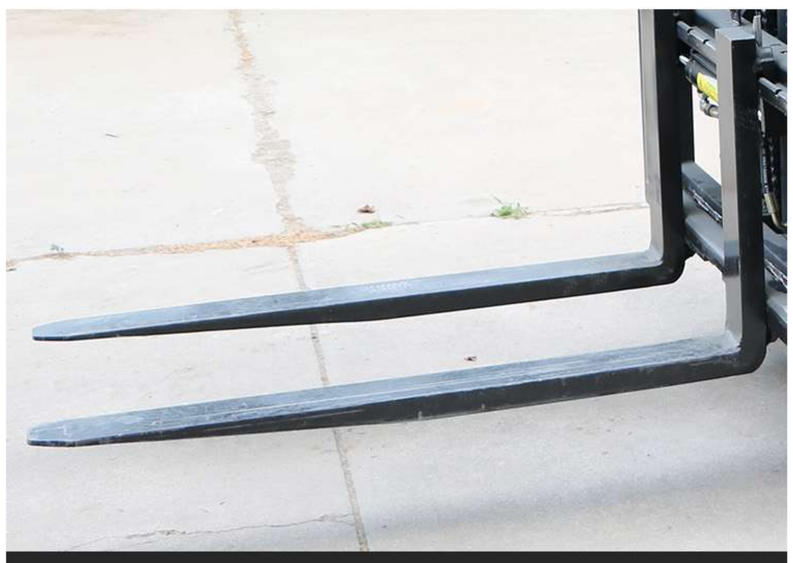

Thickened fork

Special steel, high load-capacity, non-deformable.

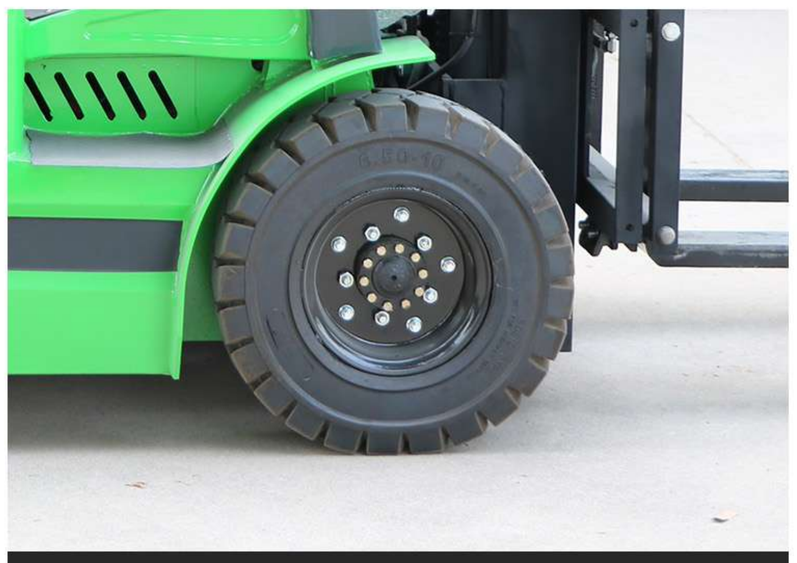

Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

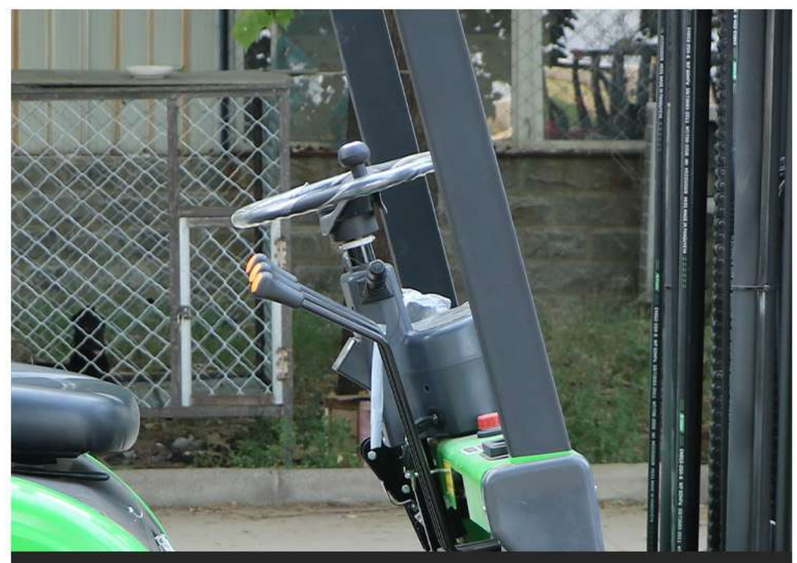

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.

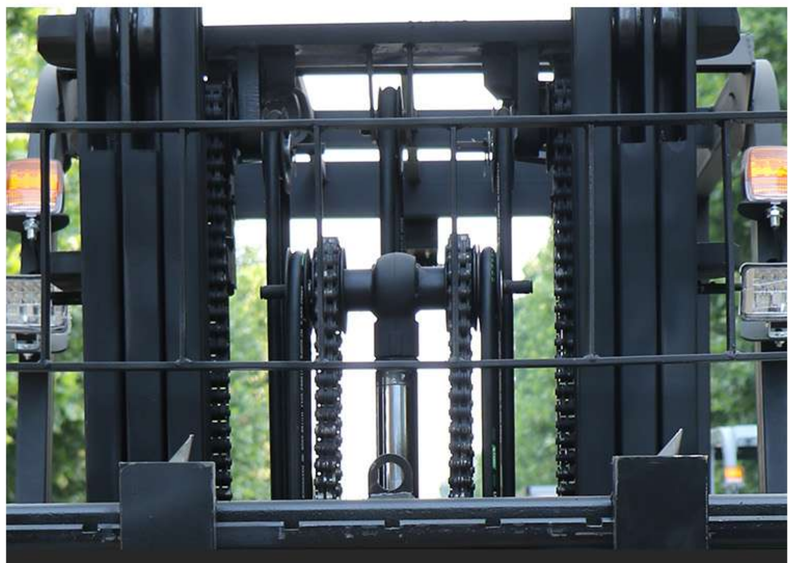

Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD25(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	5kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	10 Chaowei dry batteries (60V/ 140ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel, power seats, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	1220mm - body forged fork
Hvdraulic lift motor	4kw brushless AC motor
Gantry frame material	120mm special steel doorframe
Steering mode	hydraulic power steering
Turning radius	2000mm
Charging time	5-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 220 bridge
Maximum lifting weight	2500kg

long	2500mm without fork
long	3720mm containing fork
wide	1150mm
high	2150MM
Total vehicle weight	3300kg
Tires	Front tires: 650-10(Grade A high -wear solid tire); rear tires: 500-B (Grade A high-wear solid tire)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

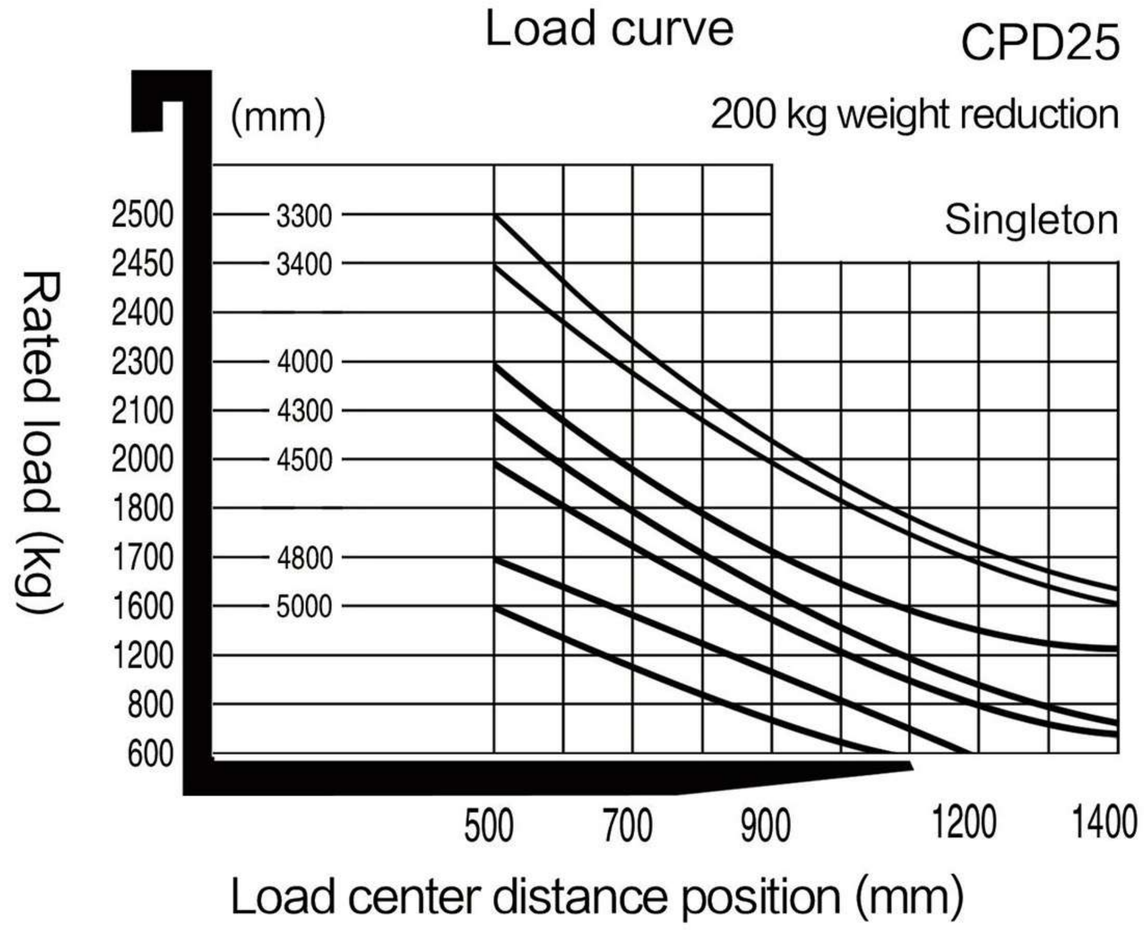

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD30(4-Wheel Forklift)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

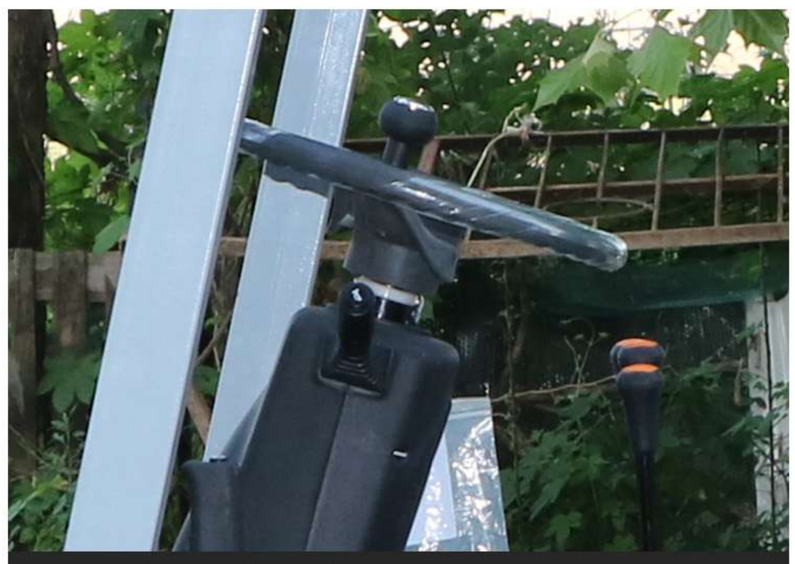

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD30(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	7.5kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	10 Chaowei dry batteries (60V/ 170ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	1220mm - body forged fork
Hvdraulic lift motor	5kw brushless AC motor
Gantry frame material	150mm special steel doorframe
Steering mode	hydraulic power steering
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 310 bridge
Maximum lifting weight	3000kg

long	2650mm without fork
long	3870mm containing fork
wide	1150mm
high	2150MM
Total vehicle weight	3700kg
Tires	Front tires: 650-10(Class A high -wear solid tire); rear tires: 500-8 (Class A high-wear solid tire)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

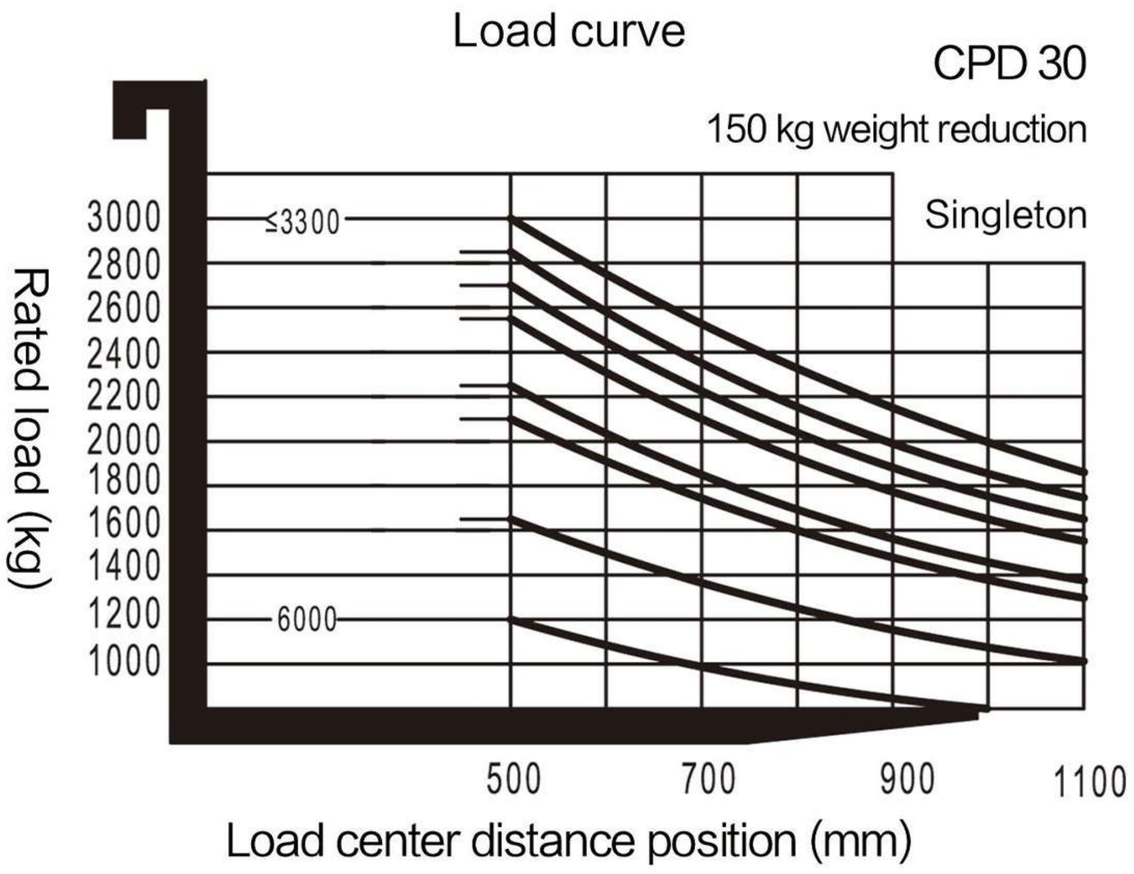

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD35(4-Wheel Forklift)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.



Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.

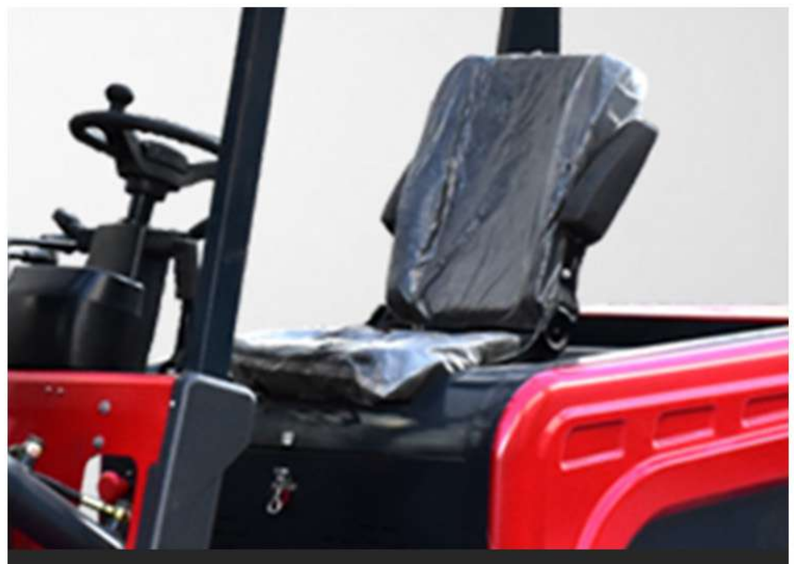

High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD35(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	10kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	10 Chaowei dry batteries (60V/ 200ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customizec
Hvdraulic lift motor	10kw brushless AC motor
Gantry frame material	150mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2000mm
Charging time	6-8 hours
Continuous working hours	About 6 hours
Angle of climb	12degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 310 bridge
Maximum lifting weight	3500kg

long	1500mm without fork
long	4170mm containing fork
wide	1200mm
high	2150MM
Total vehicle weight	4200kg
Tires	Front tires: 650-10(Class A high -wear solid tire); rear tires: 18*7 -8(Class A high-wear solid tire)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

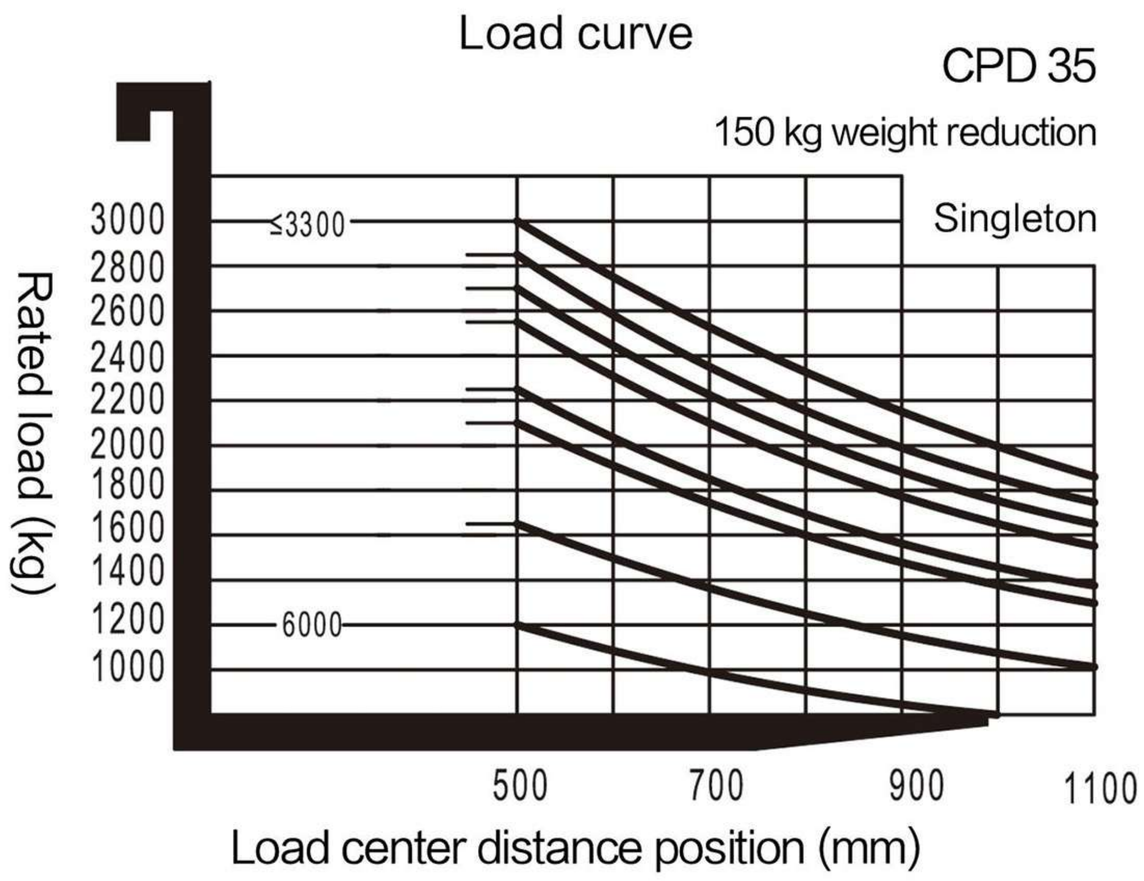

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

CPD40(4-Wheel Forklift)

BEIQIANG
BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features

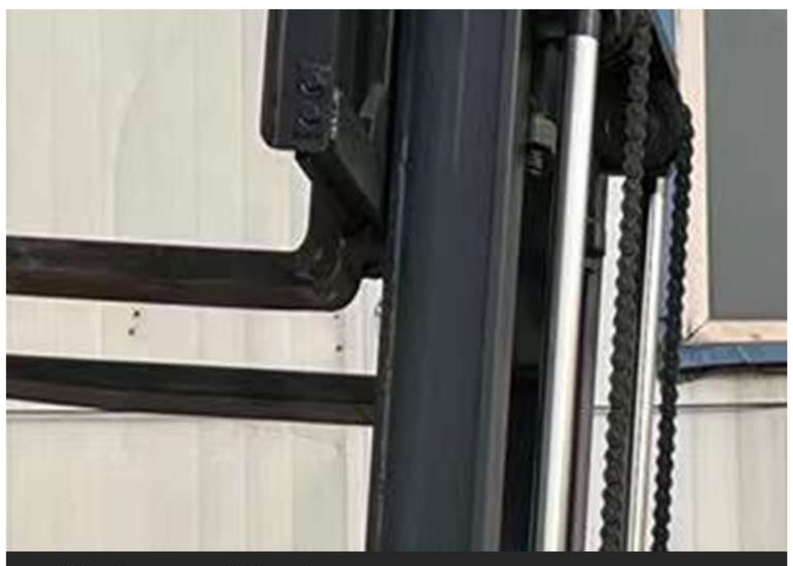

Thickened fork

Special steel, high load-capacity, non-deformable.



Standard solid tires

Solid tires avoid blowouts, improve work efficiency.

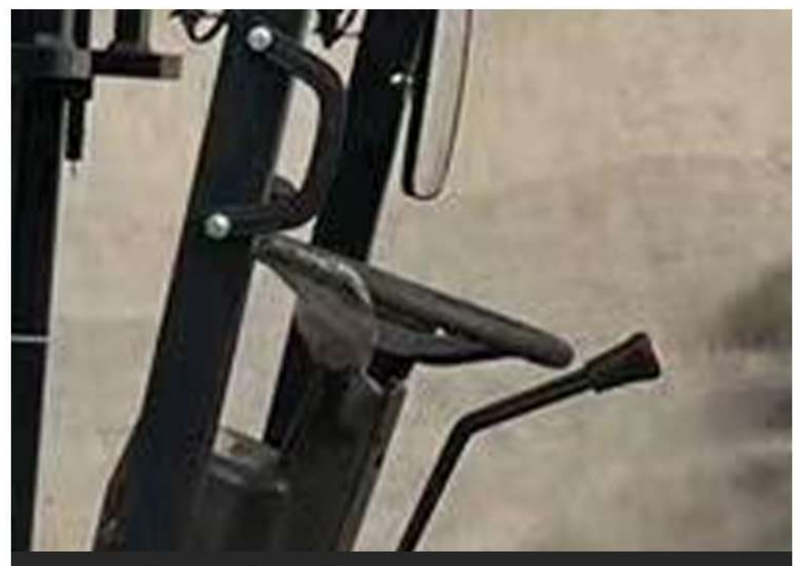

Steering wheel

User-friendly controls forprecise handling andgreater efficiency.



Multi-piece composite chain

Smoother transmission, higher load capacity.



High-end driving seat

Adjustable comfortable seat with safety seatbelt.



Overhead guard

High-strength protective frame ensures operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

CPD40(4-Wheel Forklift)

■ Product Parameters

Body material	Thickened one-piece stampedbody
Walking motor	13.5kw brushless AC motor
Voltage	60v
Controller	Fuzhou Xinlianda
battery	12 Chaowei dry batteries (60V/ 250ah)
Lights and Signals	Headlights, left and right turn signals, brake lights, instrument panel lights, electric horn, etc.
Lift the cylinder	High-Precision Machined Air-Worn Housing, Single-Directional, Dual-Cylinder
Fork length	0.8m to 1.6m can be customizec
Hvdraulic lift motor	15kw brushless AC motor
Gantry frame material	160mm special steel doorframe
Steering mode	Mechanical assisted operation
Turning radius	2400mm
Charging time	6 hours
Continuous working hours	About 6-8 hours
Angle of climb	25degrees
Braking mode	Hand brake, engine brake
Drive axle	Fully suspended cast steelone-piece 318 bridge
Maximum lifting weight	4000kg

long	2800mm without fork
long	4020mm containing fork
wide	1250mm
high	2250MM
Total vehicle weight	4800kg
Tires	Front tires: 28*9-15(Class A high -wear solid tire); rear tires: 650-10(Class A high-wear solid tire)
The steering bridge	Special rear axle for heavy-duty steel plate forklifts
Lifting height	3000mm

■ Load-Displacement Curve

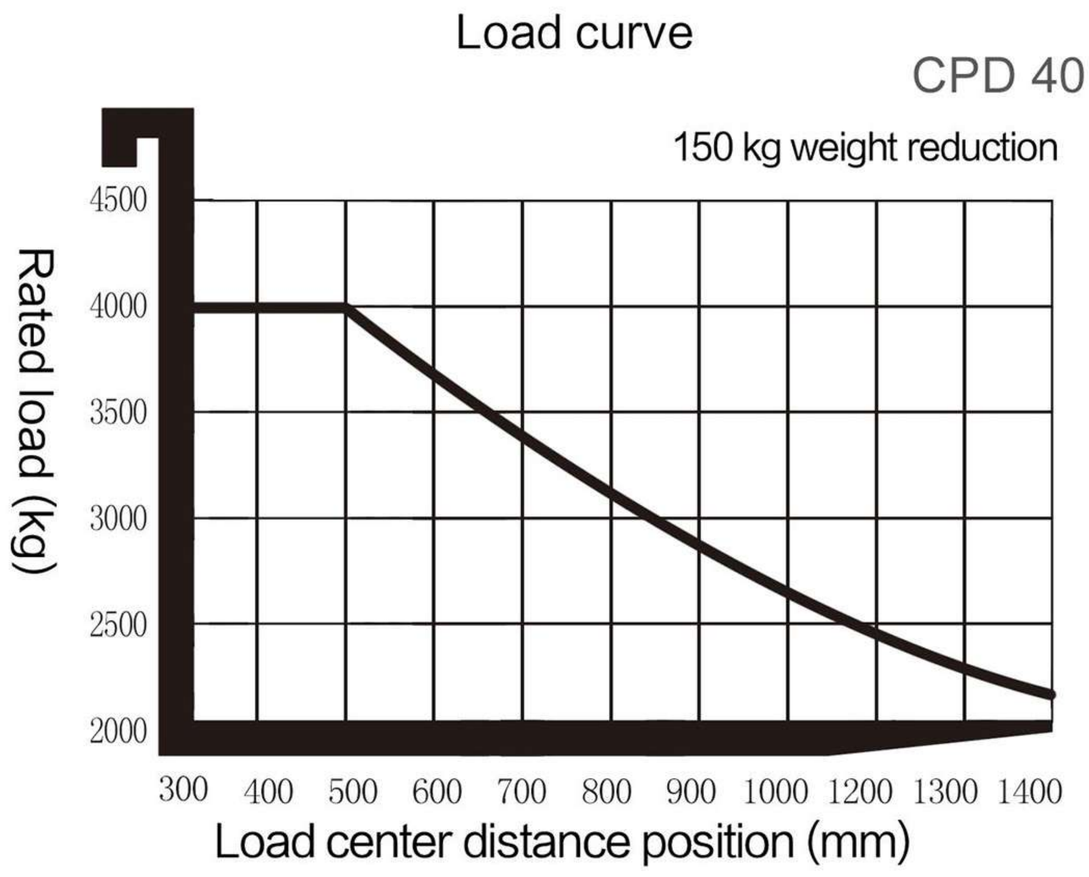

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Walkie Stacker)

Battery type: lithium battery/lead-acid battery

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won't damage the floor.

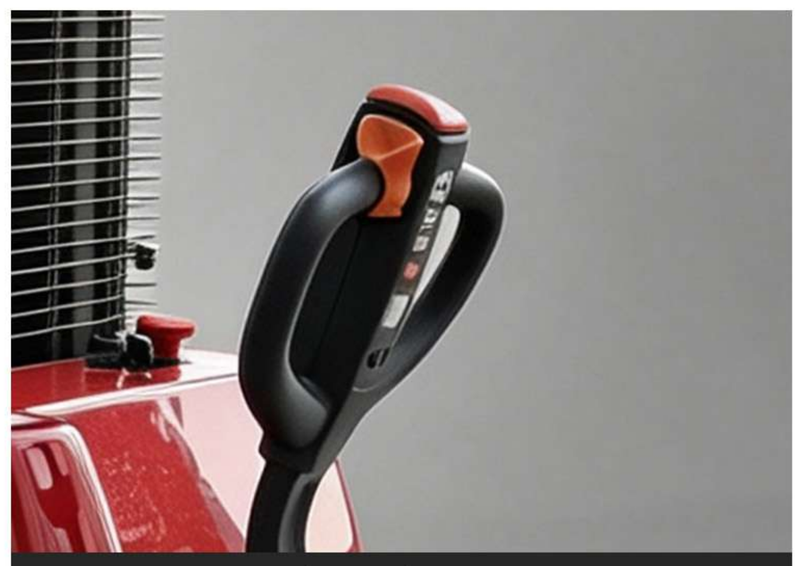

Smart Control Knob

Can be operated with either hand; easy to use.



Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.



Safety Netting

Prevents cargo from flying out, protects operators, and prevents accidental injury from the chain.



Battery

Long battery life lets you work for hours with ease.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Walkie Stacker)

■ Product Parameters

Operating type	walk
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	85mm
Outside width between forks	700mm
Inside width between forks	340mm
Fork size (Length/width)	1150*180*50 mm
Overall length	1960 mm
ocerall width	790mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	510kg
Steeringtype	Power Steering

■ Load-Displacement Curve

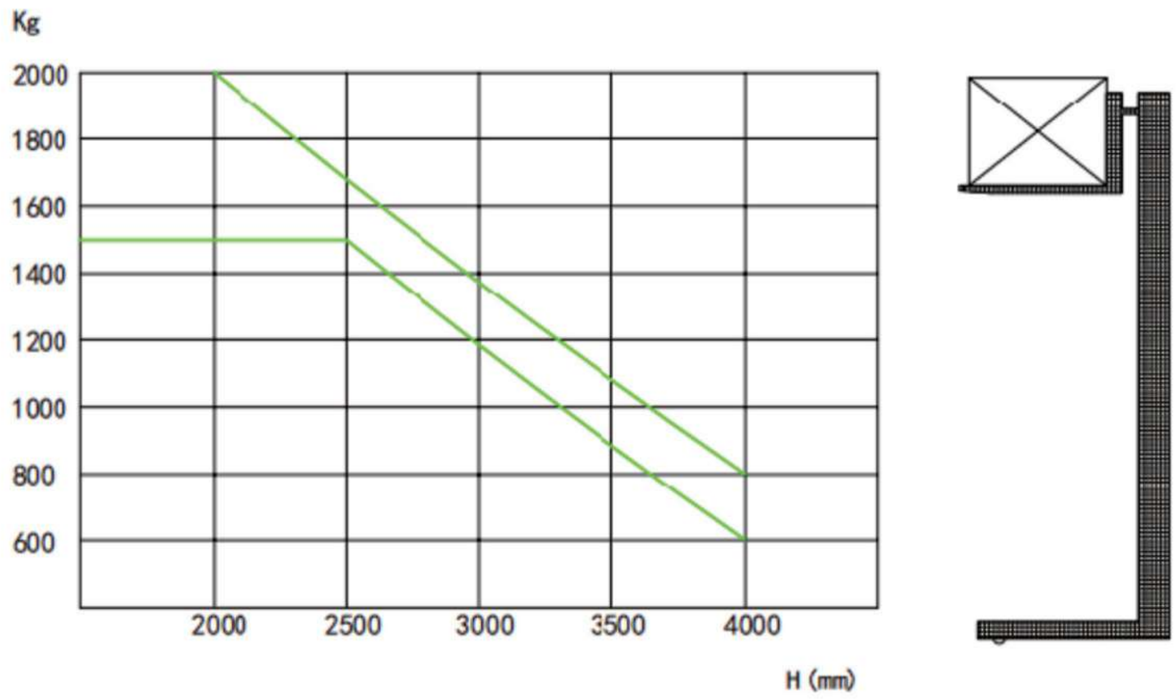

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Walkie Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won’t damage the floor.

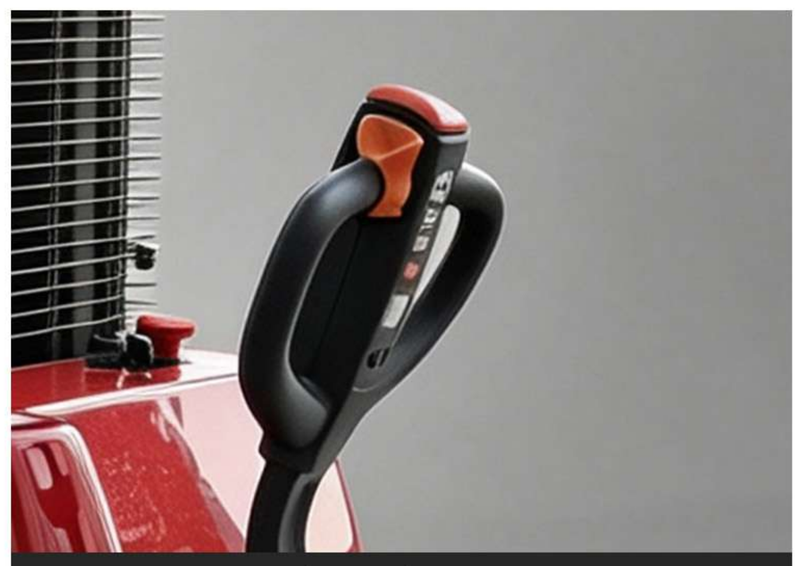

Smart Control Knob

Can be operated with either hand; easy to use.



Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.



Safety Netting

Prevents cargo from flying out, protects operators, and prevents accidental injury from the chain.



Battery

Long battery life lets you work for hours with ease.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Walkie Stacker)

■ Product Parameters

Operating type	walk
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	85mm
Outside width between forks	700mm
Inside width between forks	340mm
Fork size (Length/width)	1150*180*50 mm
Overall length	1960 mm
ocerall width	790mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	550kg
Steeringtype	Power Steering

■ Load-Displacement Curve

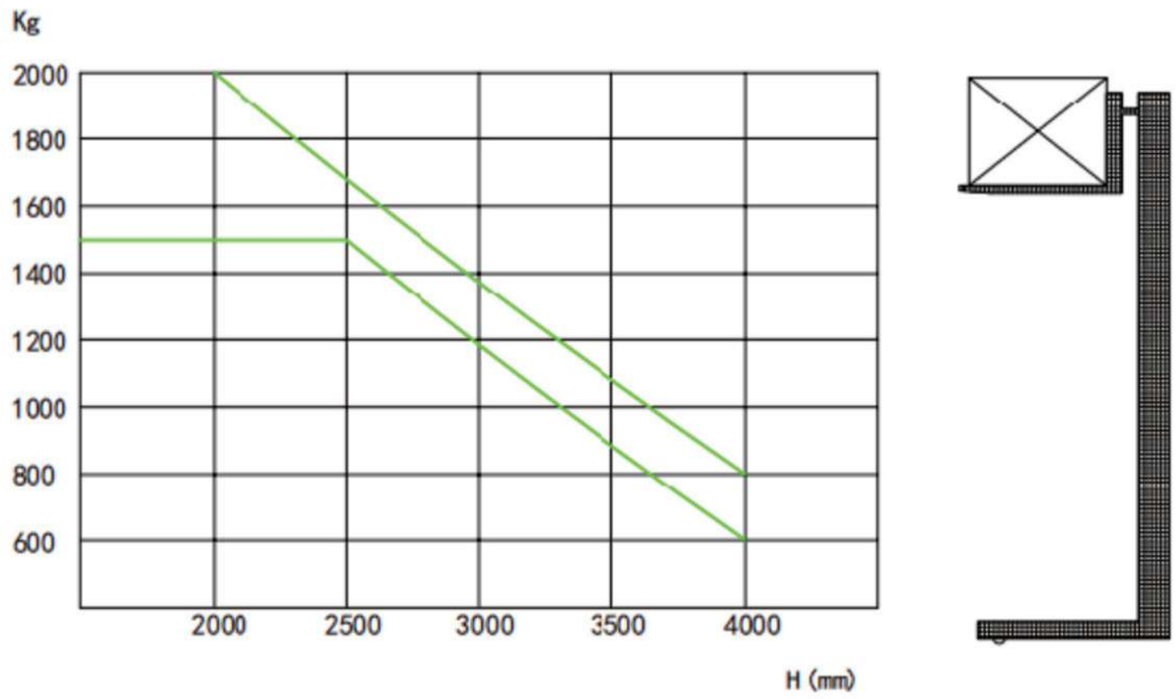

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Stand-On Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won’t damage the floor.



Smart Control Knob

Can be operated with either hand; easy to use.



Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.



Leak-proof Cylinder

Leak-free seals, smooth operation, and long-lasting durability.



Non-slip step

Thickened, non-slip step with high load capacity, moderate width, and easy to extend and retract.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Stand-On Stacker)

■ Product Parameters

Operating type	stand
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	85mm
Outside width between forks	700mm
Inside width between forks	340mm
Fork size (Length/width)	1150*180*50 mm
Overall length	2440/1934 mm
ocerall width	850mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	580kg
Steeringtype	Power Steering

■ Load-Displacement Curve

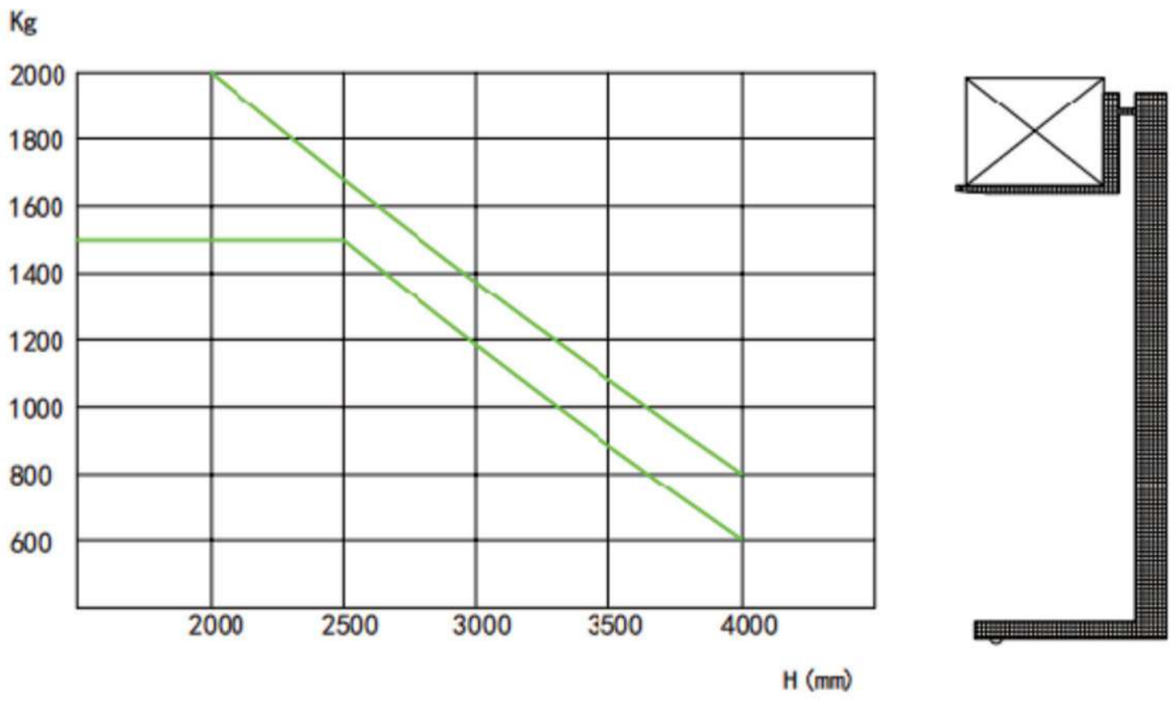

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Stand-On Stacker)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won’t damage the floor.



Smart Control Knob

Can be operated with either hand; easy to use.



Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.



Leak-proof Cylinder

Leak-free seals, smooth operation, and long-lasting durability.



Non-slip step

Thickened, non-slip step with high load capacity, moderate width, and easy to extend and retract.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Stand-On Stacker)

■ Product Parameters

Operating type	stand
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	85mm
Outside width between forks	700mm
Inside width between forks	340mm
Fork size (Length/width)	1150*180*50 mm
Overall length	2440/1934 mm
ocerall width	850mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	610kg
Steeringtype	Power Steering

■ Load-Displacement Curve

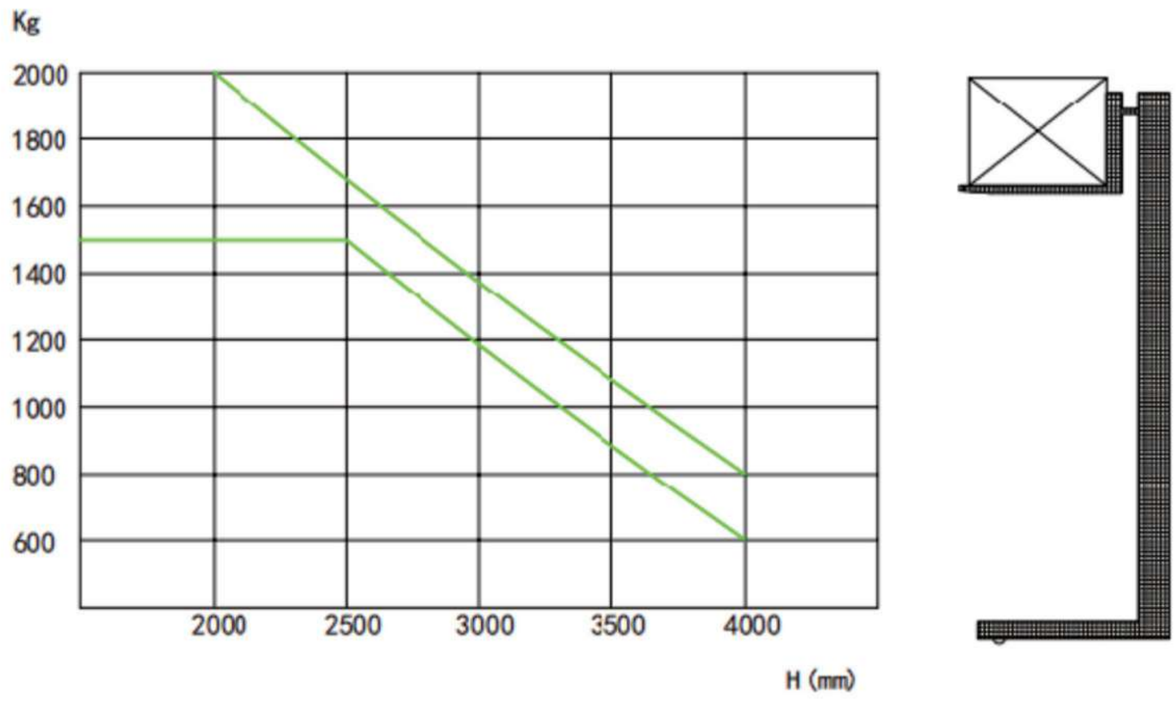

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Double Lift Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won’t damage the floor.

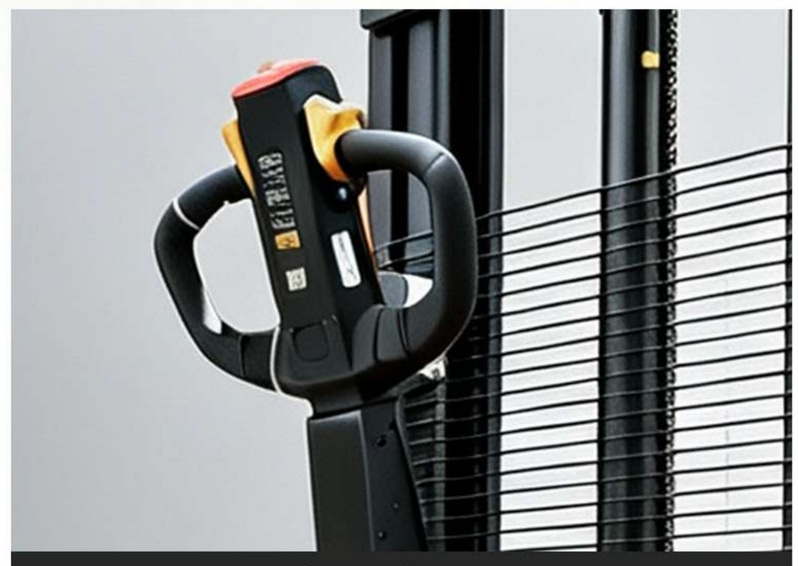

Smart Control Knob

Can be operated with either hand; easy to use.

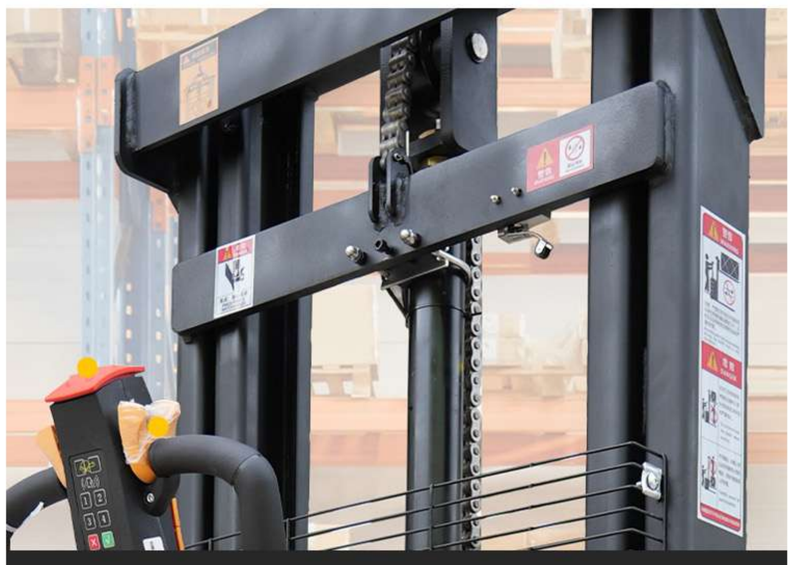

Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.

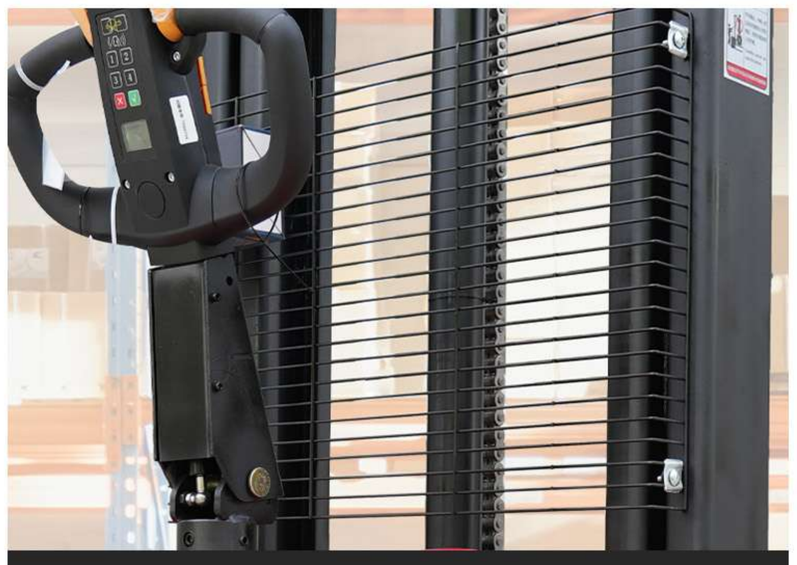

Safety Netting

Prevents cargo from flying out, protects operators, and prevents accidental injury from the chain.



Battery

Long battery life lets you work for hours with ease.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Double Lift Stacker)

■ Product Parameters

Operating type	stand
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	90-160 mm
Outside width between forks	700mm
Inside width between forks	320mm
Fork size (Length/width)	1150*190*60 mm
Overall length	2440/1934 mm
ocerall width	850mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	650kg
Steeringtype	Power Steering

■ Load-Displacement Curve

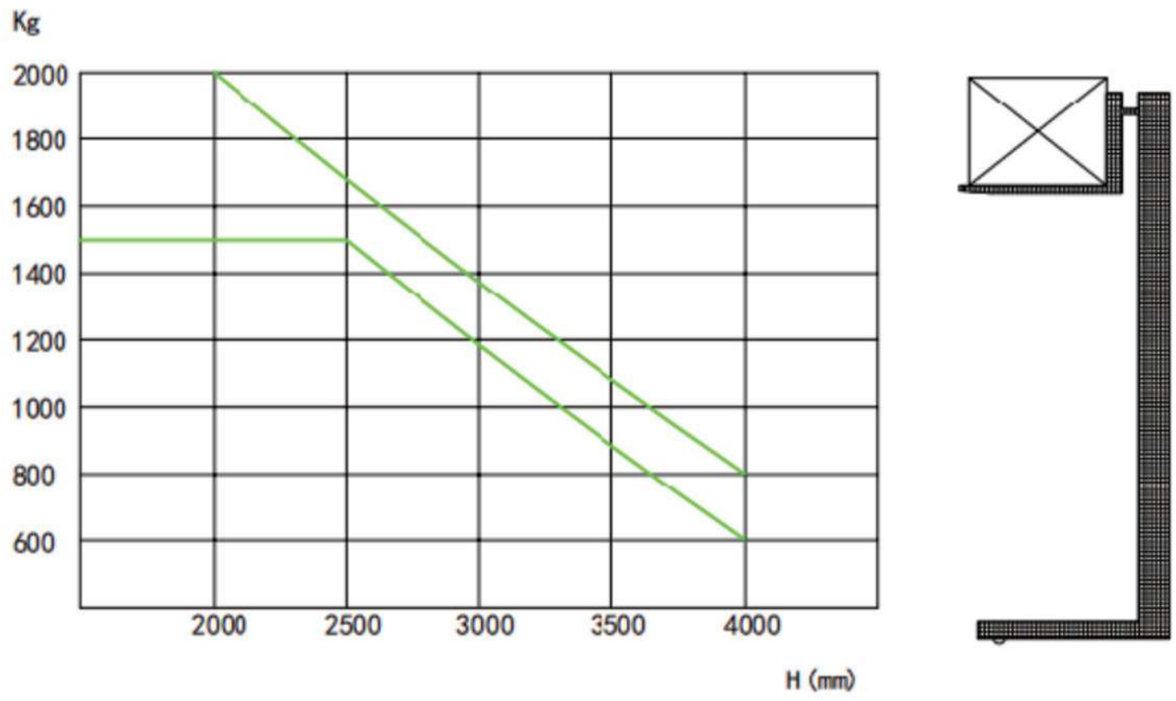

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Double Lift Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Forged Fork

One-piece forged steel forks, resistant to bending and deformation.



Wear-Resistant Casters

Thickened polyurethane anti-slip, wear-resistant casters that roll quietly and won’t damage the floor.

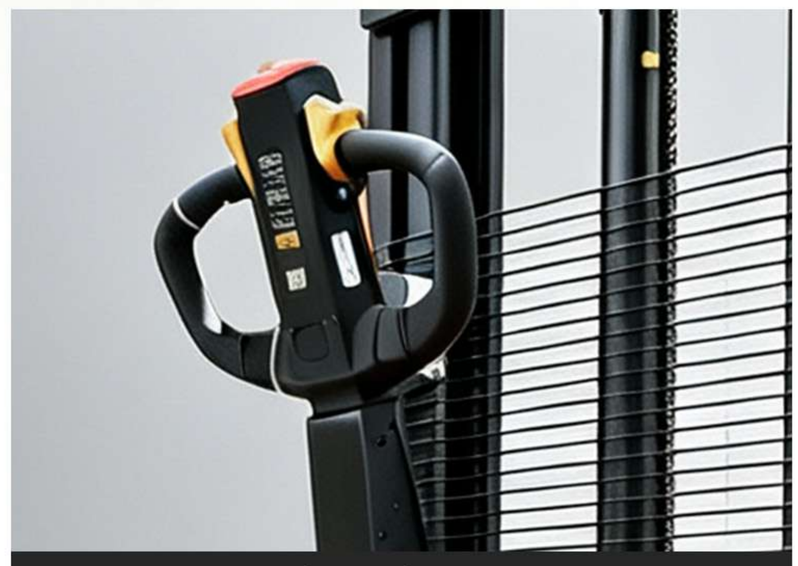

Smart Control Knob

Can be operated with either hand; easy to use.

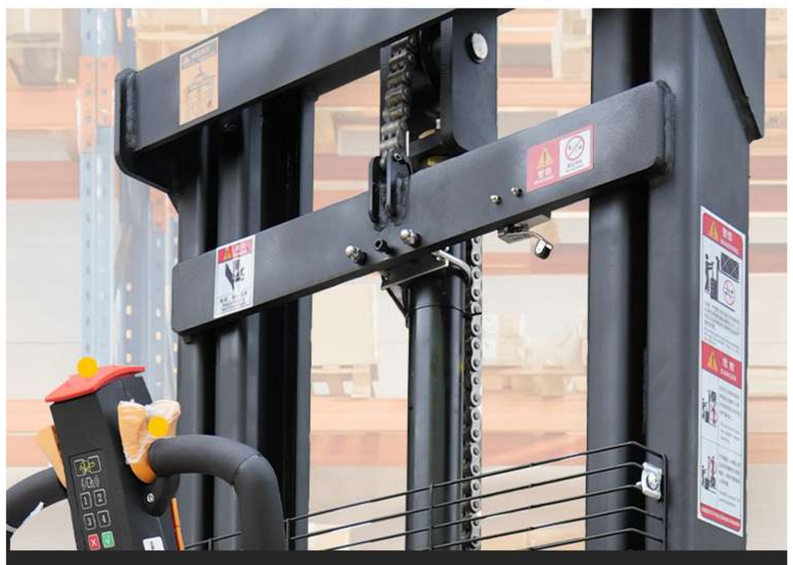

Reinforced, Heavy-Duty Chain

High-strength plate chains are reinforced to enhance durability.

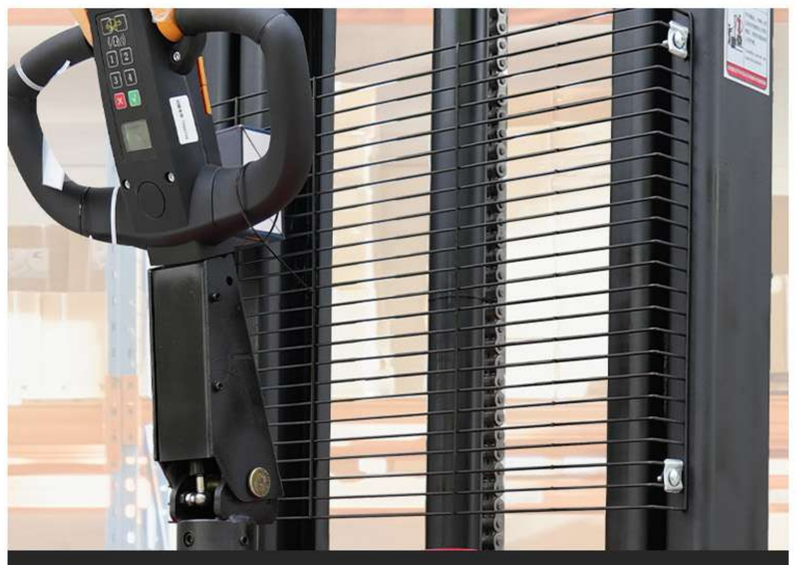

Safety Netting

Prevents cargo from flying out, protects operators, and prevents accidental injury from the chain.



Battery

Long battery life lets you work for hours with ease.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Double Lift Stacker)

■ Product Parameters

Operating type	stand
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/4
Driving wheel size	Φ170-55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ80-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000 mm
Min.fork lowered height	90-160 mm
Outside width between forks	700mm
Inside width between forks	320mm
Fork size (Length/width)	1150*190*60 mm
Overall length	2440/1934 mm
ocerall width	850mm
Min.Turning radius	1500mm
Travel speed, laden/unladen	5/6 km/h

Lift speed, laden/unladen	90/100 mm/s
Loweringspeed, laden/unladen	90/100 mm/s
Gradeability, laden/unladen	8/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48 V/Ah(Available in various capacities)
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	680kg
Steeringtype	Power Steering

■ Load-Displacement Curve

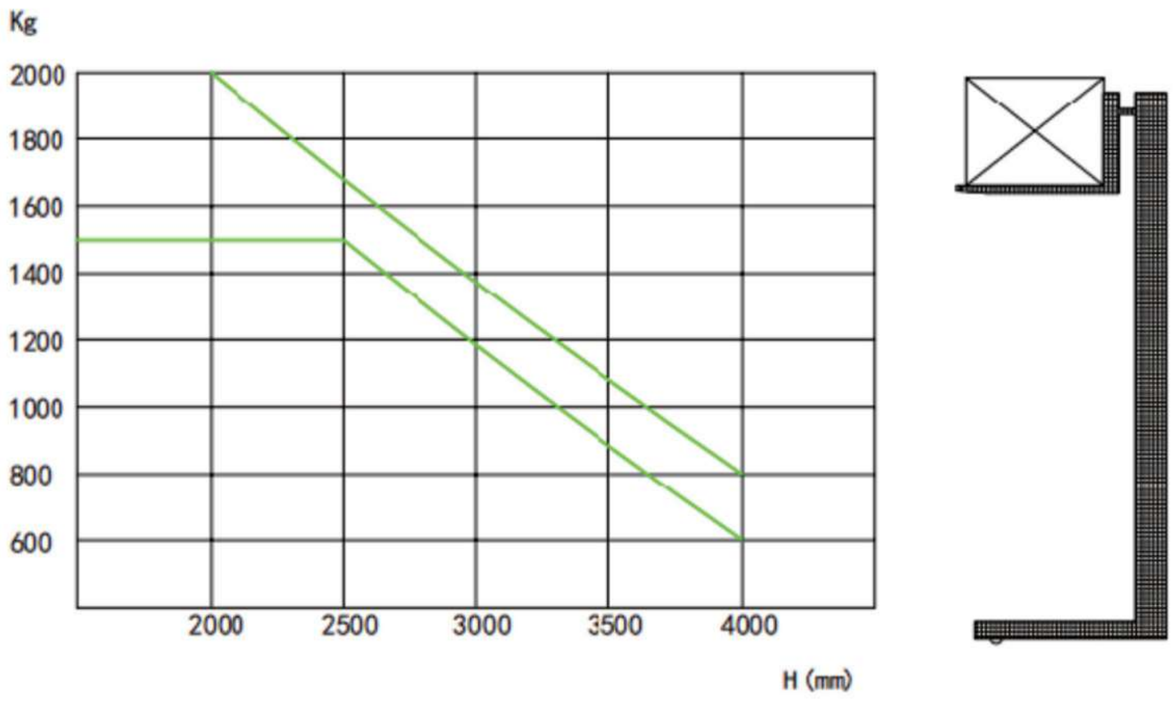

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Rough Terrain Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Wide-span Off-road Chassis

Extended outriggers, high ground clearance, anti-tipping for heavy loads on uneven ground.



Solid Off-road Tires

Deep-tread puncture-proof tires, strong grip for gravel & dirt roads.



Smart Control Knob

Can be operated with either hand; easy to use.



Dual-chain Lifting Mast

Heavy-duty steel mast, stable & smooth lifting movement.



Extended Heavy-duty Forks

Thick steel forks, compatible with various pallets, anti-slip load support.



Safety Foot-rest Guard Plate

Walk-behind standing platform, blocks splashing debris for operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Rough Terrain Stacker)

■ Product Parameters

Operating type	stand
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	Solid Rubber Tires
Wheelquantity	1/0/2
Driving wheel size	Φ300-100 mm
Balance wheel size	/
balance wheel size	Φ300-80 mm
Standard lift height	3000 mm
Max extend height	/
Mast lowered height	2090mm
Min.fork lowered height	85mm
Outside width between forks	1650mm
Inside width between forks	1400mm
Fork size (Length/width)	50*160*1150 mm
Overall length	2417 mm
ocerall width	1650mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	85/155 mm/s
Loweringspeed, laden/unladen	144/104 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Rough Terrain Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Wide-span Off-road Chassis

Extended outriggers, high ground clearance, anti-tipping for heavy loads on uneven ground.



Solid Off-road Tires

Deep-tread puncture-proof tires, strong grip for gravel & dirt roads.



Smart Control Knob

Can be operated with either hand; easy to use.



Dual-chain Lifting Mast

Heavy-duty steel mast, stable & smooth lifting movement.



Extended Heavy-duty Forks

Thick steel forks, compatible with various pallets, anti-slip load support.



Safety Foot-rest Guard Plate

Walk-behind standing platform, blocks splashing debris for operator safety.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Rough Terrain Stacker)

■ Product Parameters

Operating type	stand
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	Solid Rubber Tires
Wheelquantity	1/0/2
Driving wheel size	Φ300-100 mm
Balance wheel size	/
balance wheel size	Φ300-80 mm
Standard lift height	3000 mm
Max extend height	/
Mast lowered height	2090mm
Min.fork lowered height	85mm
Outside width between forks	1650mm
Inside width between forks	1400mm
Fork size (Length/width)	50*160*1150 mm
Overall length	2417 mm
ocerall width	1650mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	105/175 mm/s
Loweringspeed, laden/unladen	115/110 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electronic Brakes
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Electric Reach Stacker)

Battery type: lithium battery/lead-acid battery

BEIQIANG

CARRY THE FUTURE

稳定是基础，安全是保障

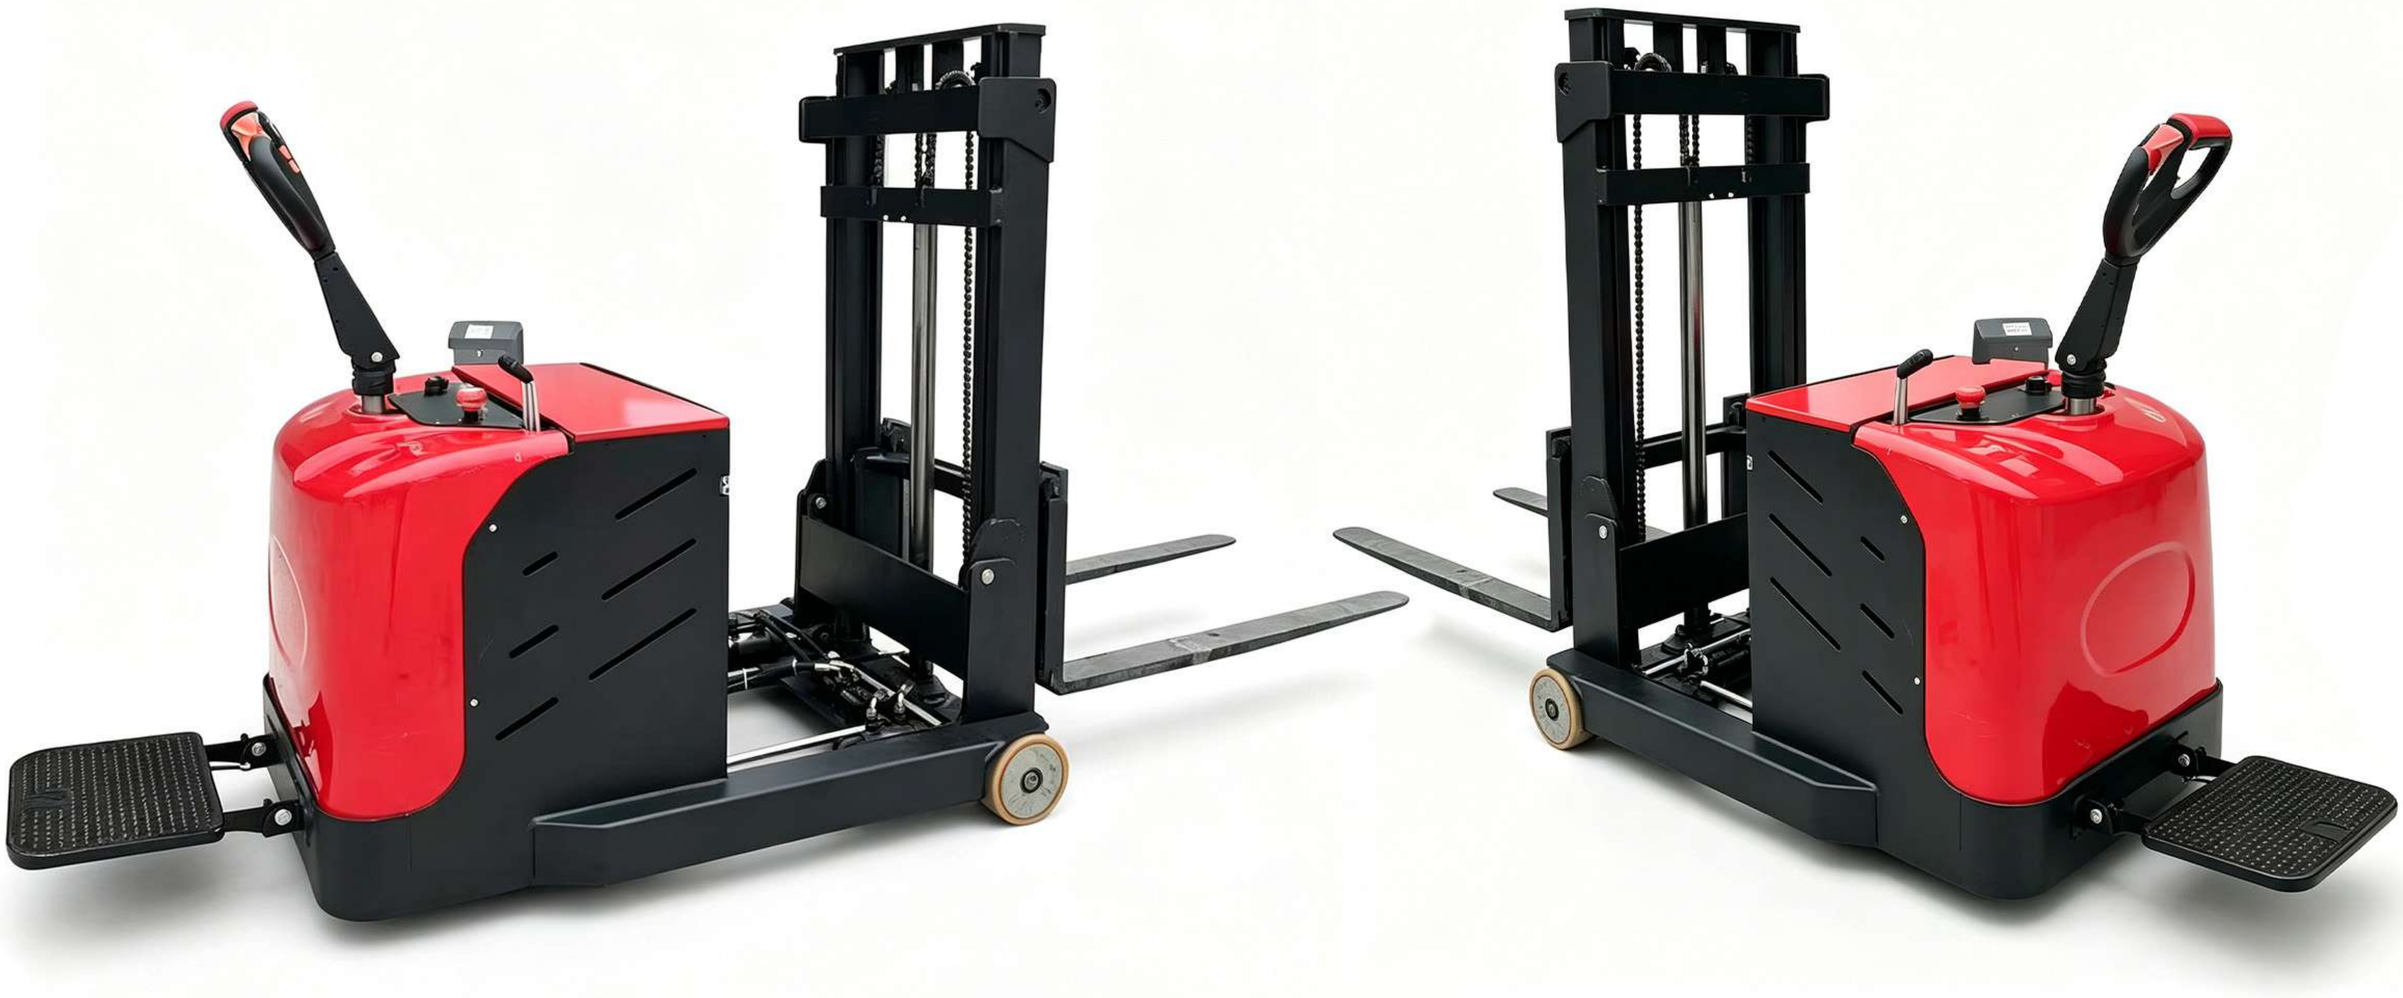

Features



Reach-out Counterweight Body

Extendable forks, suitable for narrow-aisle pallet handling.



Anti-slip Stand-on Platform

Labor-saving for long-distance transport.



Electric Hydraulic Lifting

Stable chain-driven lifting with precise height control.



All-in-one Control Handle

Flexible steering, simple operation.



Heavy-duty Steel Mast & Forks

High load-bearing capacity for standard pallets.

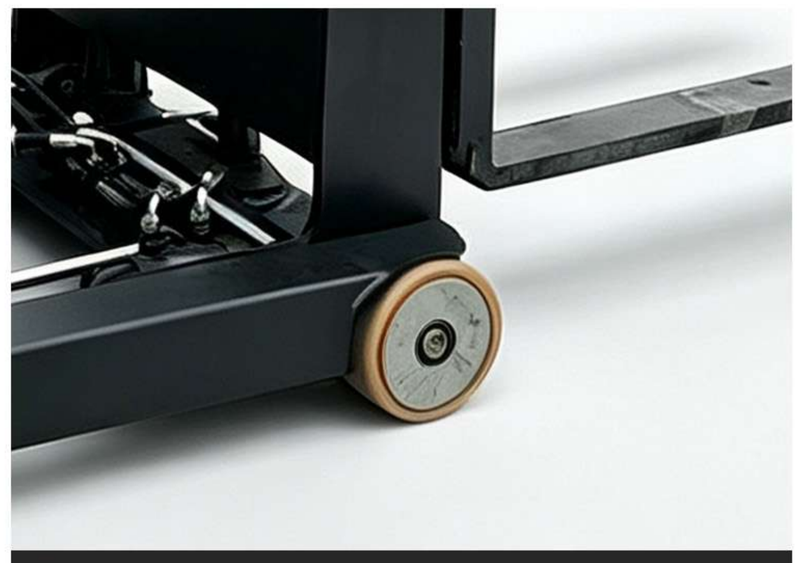

Wear-resistant Solid Wheels

Slip-proof, fits various floor surfaces.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Electric Reach Stacker)

■ Product Parameters

Operating type	stand
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/2
Driving wheel size	Φ300-100 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ200-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000mm
Min.fork lowered height	50mm
Outside width between forks	/
Inside width between forks	/
Fork size (Length/width)	1070 mm
Overall length	1986 mm
ocerall width	1047mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	85/155 mm/s
Loweringspeed, laden/unladen	144/104 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electromagnetic Brake
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Electric Reach Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery



Features



Reach-out Counterweight Body

Extendable forks, suitable for narrow-aisle pallet handling.

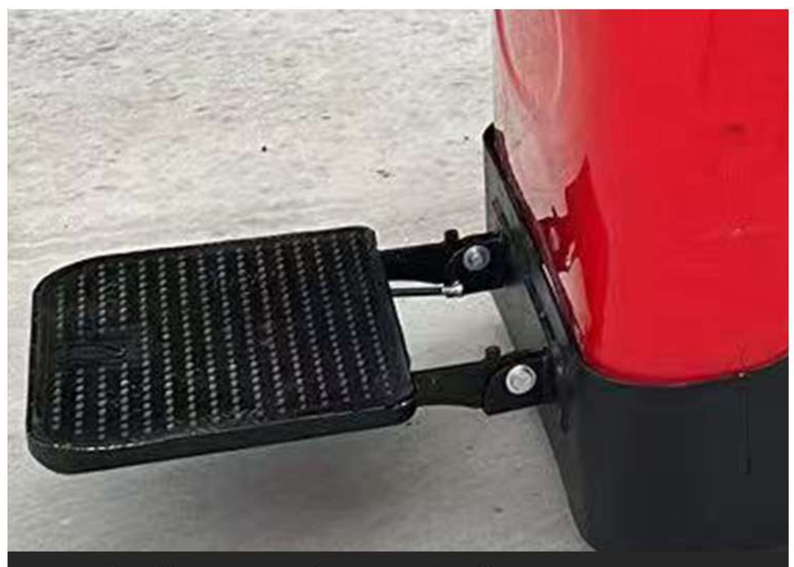

Anti-slip Stand-on Platform

Labor-saving for long-distance transport.

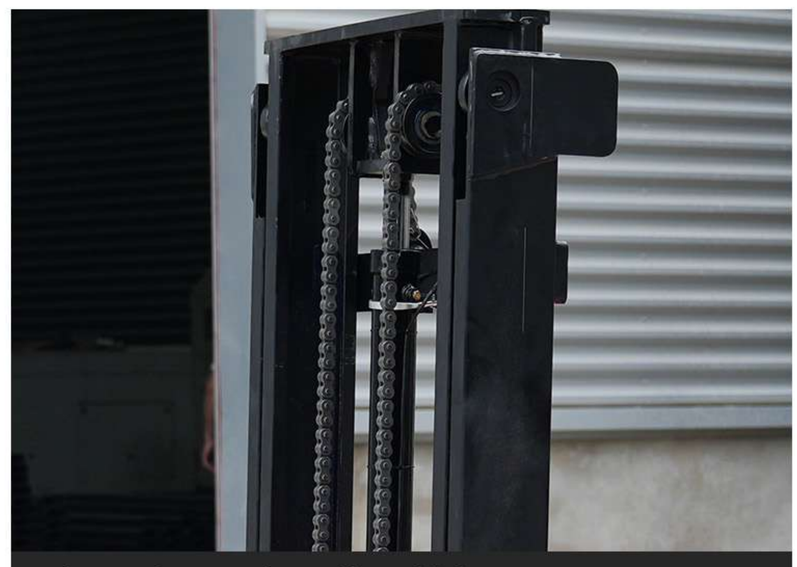

Electric Hydraulic Lifting

Stable chain-driven lifting with precise height control.



All-in-one Control Handle

Flexible steering, simple operation.



Heavy-duty Steel Mast & Forks

High load-bearing capacity for standard pallets.



Wear-resistant Solid Wheels

Slip-proof, fits various floor surfaces.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Electric Reach Stacker)

■ Product Parameters

Operating type	stand
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/2
Driving wheel size	Φ300-100 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ200-70 mm
Standard lift height	2000/2500/3000 mm
Max extend height	/
Mast lowered height	1560/1760/2000mm
Min.fork lowered height	50mm
Outside width between forks	/
Inside width between forks	/
Fork size (Length/width)	1070 mm
Overall length	1986 mm
ocerall width	1047mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	105/175 mm/s
Loweringspeed, laden/unladen	115/110 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electromagnetic Brake
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

1.5T(Counterbalanced Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Counter-Balance Structure

Rear-mounted weight for anti-tipping, no outriggers, wide aisle adaptability.



Heavy-Duty Lift Mast

Reinforced steel mast, smooth lifting, long service life.



Extended Forged Forks

Even load-bearing, compatible with most pallets.



Stand-on Platform

Anti-slip riding pedal, labor-saving for long-distance transport.

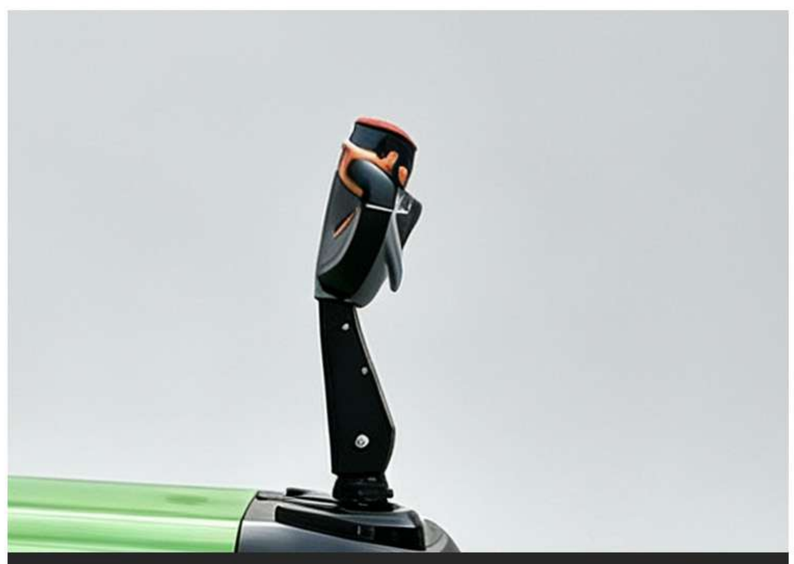

Multi-function Control Handle

One-hand integrated control for lift & travel.



Wear-resistant PU Wheels

Floor-friendly, flexible & smooth steering.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

1.5T(Counterbalanced Stacker)

■ Product Parameters

Operating type	stand
Load capacity	1500mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/2
Driving wheel size	Φ170*55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ200-70 mm
Standard lift height	3000mm
Max extend height	3450mm
Mast lowered height	2070mm
Min.fork lowered height	50mm
Outside width between forks	1020mm
Inside width between forks	680mm
Fork size (Length/width)	35*40*1070 mm
Overall length	2151/1730 mm
ocerall width	1020mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	85/155 mm/s
Loweringspeed, laden/unladen	144/104 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	1500/2200 W
Battery voltage /capacity	48/32 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electromagnetic Brake
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

2T(Counterbalanced Stacker)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Counter-Balance Structure

Rear-mounted weight for anti-tipping, no outriggers, wide aisle adaptability.



Heavy-Duty Lift Mast

Reinforced steel mast, smooth lifting, long service life.



Extended Forged Forks

Even load-bearing, compatible with most pallets.



Stand-on Platform

Anti-slip riding pedal, labor-saving for long-distance transport.

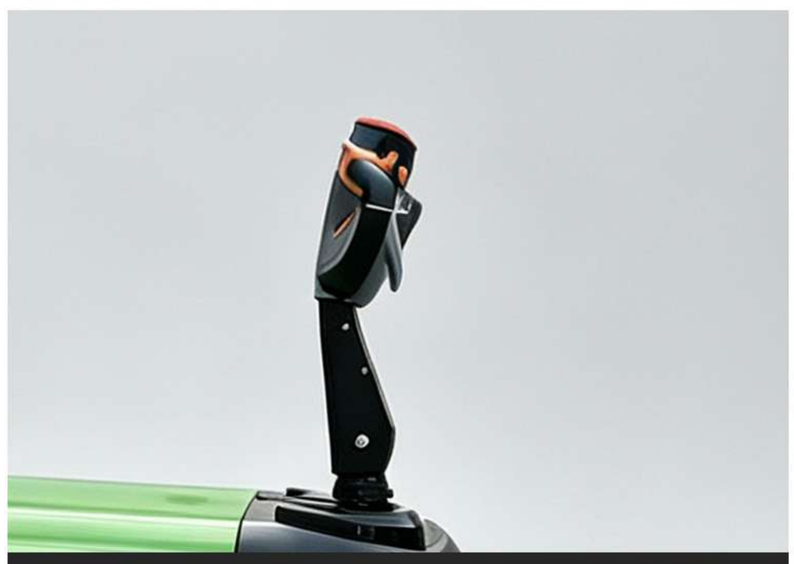

Multi-function Control Handle

One-hand integrated control for lift & travel.



Wear-resistant PU Wheels

Floor-friendly, flexible & smooth steering.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

2T(Counterbalanced Stacker)

■ Product Parameters

Operating type	stand
Load capacity	2000mm
Load center	500mm
Wheel base	/
Wheels type	UP
Wheelquantity	1/1/2
Driving wheel size	Φ170*55 mm
Balance wheel size	Φ115-55 mm
balance wheel size	Φ200-70 mm
Standard lift height	3000mm
Max extend height	3450mm
Mast lowered height	2070mm
Min.fork lowered height	50mm
Outside width between forks	1020mm
Inside width between forks	680mm
Fork size (Length/width)	35*40*1070 mm
Overall length	2151/1730 mm
ocerall width	1020mm
Min.Turning radius	/
Travel speed, laden/unladen	4/5 km/h

Lift speed, laden/unladen	105/175 mm/s
Loweringspeed, laden/unladen	115/110 mm/s
Gradeability, laden/unladen	6/10 %
Drivemotor/ Liftmotor	2000/3000 W
Battery voltage /capacity	48/32 V/Ah
Chargerspeci-fication	48/8 V/Ah
Controller	Jinshun JS
Brake	Electromagnetic Brake
Battery weight	/
Sercice weight with battery	/
Steeringtype	Power Steering

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Semi-Electric Hand Pallet Truck)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery



Features



Manual Hydraulic Lifting

Smooth lifting, low-maintenance.



Reinforced Forks

High-strength load-bearing forks.



Small Silent Wheels

Smooth running for flat floors.



Emergency-Stop Handle

One-button safety cut-off.



Anti-rust Paint Coating

Wear-resistant & rust-proof.



Detachable Lithium-ion Battery

Easy to take-out & quick charge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Semi-Electric Hand Pallet Truck)

■ Product Parameters

Model	Semi-Electric (Off-Road Model)
Rated Load	2000/3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Manual lifting
Wheel Types	Front and Back UP/Nylon
Drive Wheel Dimensions	Φ175*55 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1160mm
Overall Vehicle Length	1650mm
Fork Thickness	40mm
Overall Height (including handle)	1260mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	560mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V20A
Drive Motor Power	1200W
Gross Vehicle Weight	165KG
Hoist Motor Power	/
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Full Electric Pallet Truck)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Electric Hydraulic Lift

One-button lifting, smooth height adjustment.



Rein-forced Load Forks

High-strength steel, heavy-load resistant, anti-deformation.



Small Silent Wheels

Smooth running for flat floors.

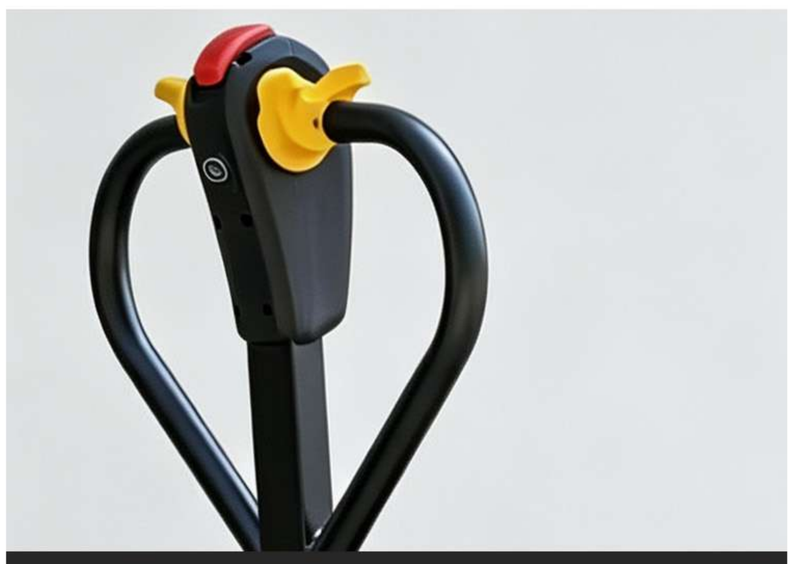

Emergency-Stop Handle

One-button safety cut-off.



Anti-rust Paint Coating

Wear-resistant & rust-proof.



Detachable Lithium-ion Battery

Easy to take-out & quick charge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Full Electric Pallet Truck)

■ Product Parameters

Model	All-Electric (Off-Road Model)
Rated Load	2000/3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Electric Lift
Wheel Types	Front and Back UP/Nylon
Drive Wheel Dimensions	Φ175*55 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1160mm
Overall Vehicle Length	1670mm
Fork Thickness	40mm
Overall Height (including handle)	1260mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	560mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V20A
Drive Motor Power	1200W
Gross Vehicle Weight	165KG
Hoist Motor Power	2200W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Large-Wheel Semi-Electric Pallet Truck)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features

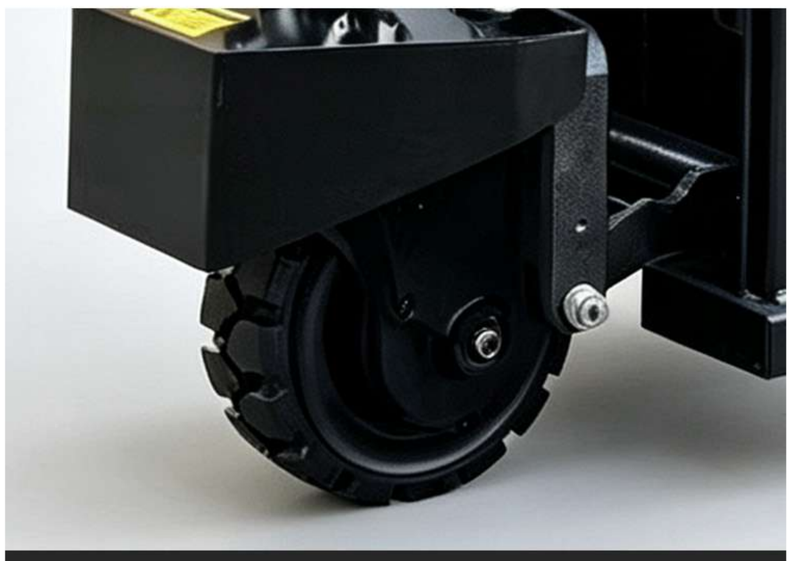

Large-Size Off-Road Wheels

Deep-tread rubber tyre, strong grip, fit for muddy & rough ground.



Manual Hydraulic Lifting

Hand-operated lift, stable height adjustment, easy maintenance.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.

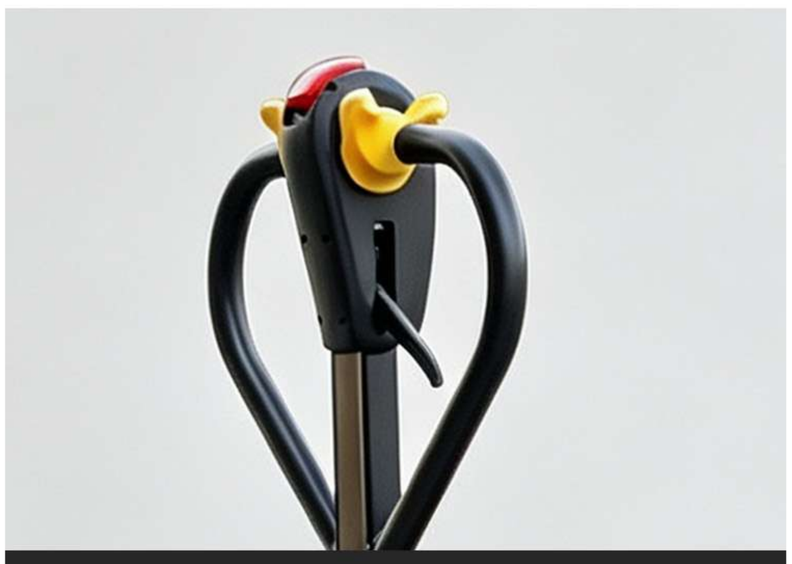

Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.

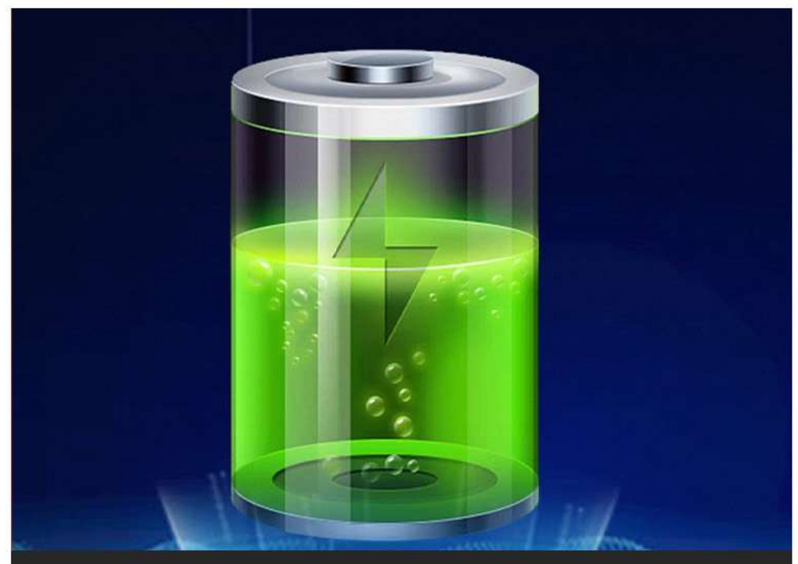

Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Large-Wheel Semi-Electric Pallet Truck)

■ Product Parameters

Model	Semi-Electric (Off-Road Model)
Rated Load	2000/3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Manual lifting
Wheel Types	Rubber in the front, UP/nylon in the rear
Drive Wheel Dimensions	Φ300*100 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1160mm
Overall Vehicle Length	1700mm
Fork Thickness	40mm
Overall Height (including handle)	1380mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	700mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V20A
Drive Motor Power	1200W
Gross Vehicle Weight	195KG
Hoist Motor Power	/
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Large-Wheel All-Electric)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Large-Size Off-Road Wheels

Deep-tread rubber tyre, strong grip, fit for muddy & rough ground.



Electric Hydraulic Lifting

One-button lift & lower, stable and efficient.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.



Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.



Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Large-Wheel All-Electric)

■ Product Parameters

Model	All-Electric (Off-Road Model)
Rated Load	2000/3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Electric Lift
Wheel Types	Rubber in the front, UP/nylon in the rear
Drive Wheel Dimensions	Φ300*100 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1160mm
Overall Vehicle Length	1750mm
Fork Thickness	40mm
Overall Height (including handle)	1380mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	700mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V20A
Drive Motor Power	1200W
Gross Vehicle Weight	195KG
Hoist Motor Power	2200W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Off-Road “King Kong” Model)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Large-Size Off-Road Wheels

Deep-tread rubber tyre, strong grip, fit for muddy & rough ground.



Electric Hydraulic Lifting

One-button lift & lower, stable and efficient.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.



Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.

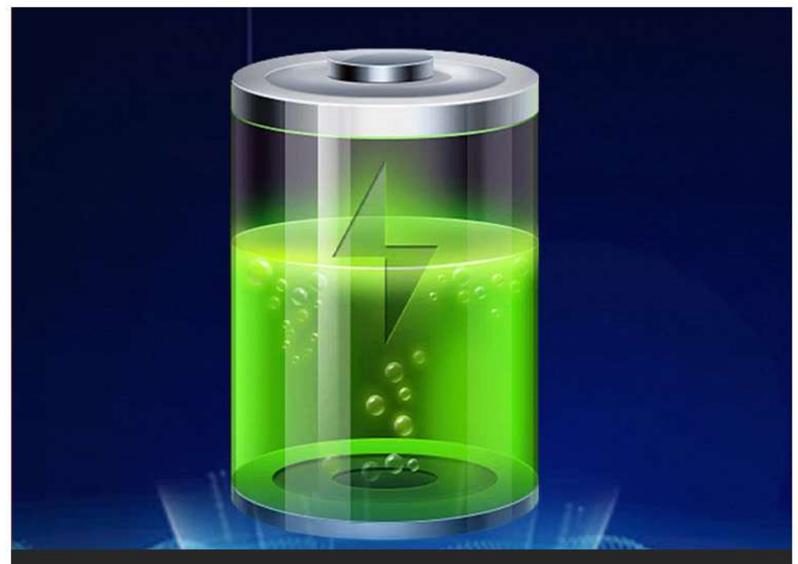

Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Off-Road "King Kong" Model)

■ Product Parameters

Model	All-Electric (Off-Road Model)
Rated Load	3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Walk-behind
Wheel Types	Rubber in the front, UP/nylon in the rear
Drive Wheel Dimensions	Φ300*100 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1150mm
Overall Vehicle Length	1680mm
Fork Thickness	40mm
Overall Height (including handle)	1240mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	680mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V lead-acid or lithium-ion batteries available
Drive Motor Power	1500W
Gross Vehicle Weight	195KG
Hoist Motor Power	2200W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Small Wheel Vajra Style)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Compact Auxiliary Wheels

Small follower wheels, flexible in narrow aisles.



Electric Hydraulic Lifting

One-button lift & lower, stable and efficient.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.

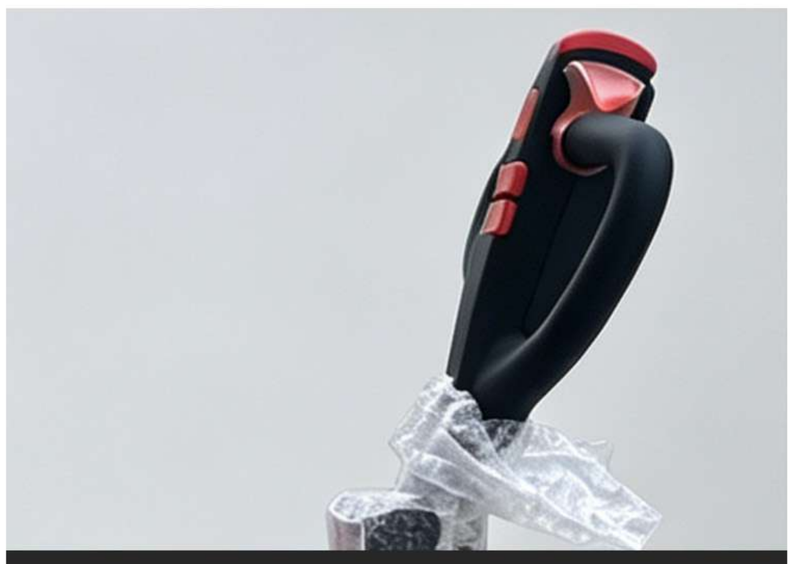

Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.



Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Small Wheel Vajra Style)

■ Product Parameters

Model	All-Electric (Small-Wheel Model)
Rated Load	3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Walk-behind
Wheel Types	UP/Nylonr
Drive Wheel Dimensions	Φ170*55 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1150mm
Overall Vehicle Length	1660mm
Fork Thickness	40mm
Overall Height (including handle)	1160mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	560mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V lead-acid or lithium-ion batteries available
Drive Motor Power	1500W
Gross Vehicle Weight	170KG
Hoist Motor Power	2200W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

3T(Bull King All-Electric)

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Durable Wheel Set

Wear-resistant small wheels, smooth rolling.



Electric Hydraulic Lifting

One-button lift & lower, stable and efficient.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.

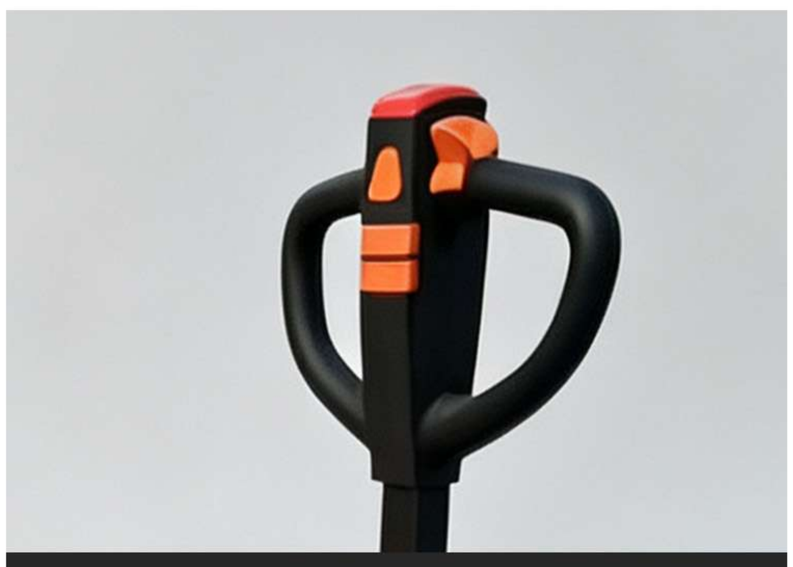

Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.



Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

3T(Bull King All-Electric)

■ Product Parameters

Model	All-Electric (Small-Wheel Model)
Rated Load	3000 KG
Center-to-center distance of loads	500mm
Lifting Method	Walk-behind
Wheel Types	UP/Nylonr
Drive Wheel Dimensions	Φ170*55 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1150mm
Overall Vehicle Length	1700mm
Fork Thickness	40mm
Overall Height (including handle)	1240mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	680mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V lead-acid or lithium-ion batteries available
Drive Motor Power	1500W
Gross Vehicle Weight	170KG
Hoist Motor Power	2200W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

5T(All-Electric SUV)

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障

Battery type: lithium battery/lead-acid battery





Features



Off-Road Drive Wheel

Thick rubber wheel, adapts to bumpy dirt roads.



Electric Hydraulic Lifting

One-button lift & lower, stable and efficient.



Heavy-Duty Reinforced Forks

High-strength steel, anti-bending, excellent load-bearing.



Safety Control Handle

Speed adjustment & emergency stop, simple operation.



Anti-Corrosion Sturdy Frame

Baked paint finish, impact-resistant, long service span.



Large-Capacity Battery

Long-lasting battery life, convenient to recharge.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

5T(All-Electric SUV)

■ Product Parameters

Model	All-Electric (Off-Road Model)
Rated Load	5000 KG
Center-to-center distance of loads	600mm
Lifting Method	Walk-behind
Wheel Types	Rubber in the front, UP/nylon in the rear
Drive Wheel Dimensions	Φ300*100 mm
Support Roll Dimensions	Φ80*70 mm
Minimum ground clearance of the forks	85mm
Maximum Lifting Height of the Forklift Forks	200mm
Inner Fork Spacing	230/365mm
Outer Fork Spacing	550/685mm
Fork Width	160mm
Fork Length	1150mm
Overall Vehicle Length	1700mm
Fork Thickness	60mm
Overall Height (including handle)	1240mm
Overall Vehicle Width	685mm

Minimum Turning Radius	1550mm
Overall Vehicle Height (excluding handle)	760mm
Gradeability (Fully Loaded/ Unloaded)	7/16%
Maximum Travel Speed (Fully Loaded/ Unloaded)	4/4.5 km/h
Battery	48V lead-acid or lithium-ion batteries available
Drive Motor Power	1500W
Gross Vehicle Weight	290KG
Hoist Motor Power	3000W
Lifting Speed (Full Load/No Load)	2.2/3.3 cm/s

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

Manual Pallet Truck

BEIQIANG
CARRY THE FUTURE
稳定是基础，安全是保障





Features



Rubber-coated handle

The descent speed of heavy loads can be controlled, improving operational safety.



Wide Polyurethane Wheels

It stays flat even after long-term use, keeps the vehicle stable while driving, and is easy to pull.



Reinforced Steel Spring

Excellent elasticity with easy recovery, long service life, and good temperature resistance.



Support Wheel

To make it easier to position the vehicle on the pallet and improve operability.



DF Weld-On Oil Pump

Increase the body's strength and durability to prevent issues such as body deformation.



Heavy-duty manganese steel body

Sturdy, durable, and resistant to warping.

The publicized pictures,specification and parameter is offered to refer,please see according to the actual goods.

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

Manual Pallet Truck

■ Product Parameters

Model	Specifications	Wheel Types	Fork Length (mm)	Ground Clearance (mm)	Maximum Height (mm)
DF20550	2 metric tons 550	Nylon Wheel	1100	85	195
DF20550	2 metric tons 550	Polyurethane Wheels	1100	85	195
DF20550	2 metric tons 550	Aluminum-Core Rubber Wheels	1100	85	195
DF20685	2 metric tons 685	Nylon Wheel	1200	85	195
DF20685	2 metric tons 685	Polyurethane Wheels	1200	85	195
DF20685	2 metric tons 685	Aluminum-Core Rubber Wheels	1200	85	195
DF20550S	2 metric tons, 550 low-profile	Nylon Wheel	1100	85	195
DF20550S	2 metric tons, 550 low-profile	Nylon Wheel	1200	85	195
AC30550	3 metric tons 550	Nylon Wheel	1100	85	195
AC30550	3 metric tons 550	Polyurethane Wheels	1100	85	195
AC30550	3 metric tons 550	Aluminum-Core Rubber Wheels	1100	85	195
AC30685	3 metric tons 685	Nylon Wheel	1200	85	195
AC30685	3 metric tons 685	Polyurethane Wheels	1200	85	195
AC30685	3 metric tons 685	Aluminum-Core Rubber Wheels	1200	85	195
AC30685I	3-metric-ton 685 Extended	Nylon Wheel	1600	85	195
AC30685I	3-metric-ton 685 Extended	Nylon Wheel	1800	85	195
AC30685I	3-metric-ton 685 Extended	Nylon Wheel	2000	85	195
AC50550	5 metric tons 550	Nylon Wheel	1100	85	195
AC50550	5 metric tons 550	Solid Iron Wheel	1100	85	195
AC50685	5 metric tons 685	Nylon Wheel	1200	85	195
AC50685	5 metric tons 685	Solid Iron Wheel	1200	85	195

Remarks: The above parameters are based on a two-section mast with a lifting height of 3 meters.

Product advantage

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障



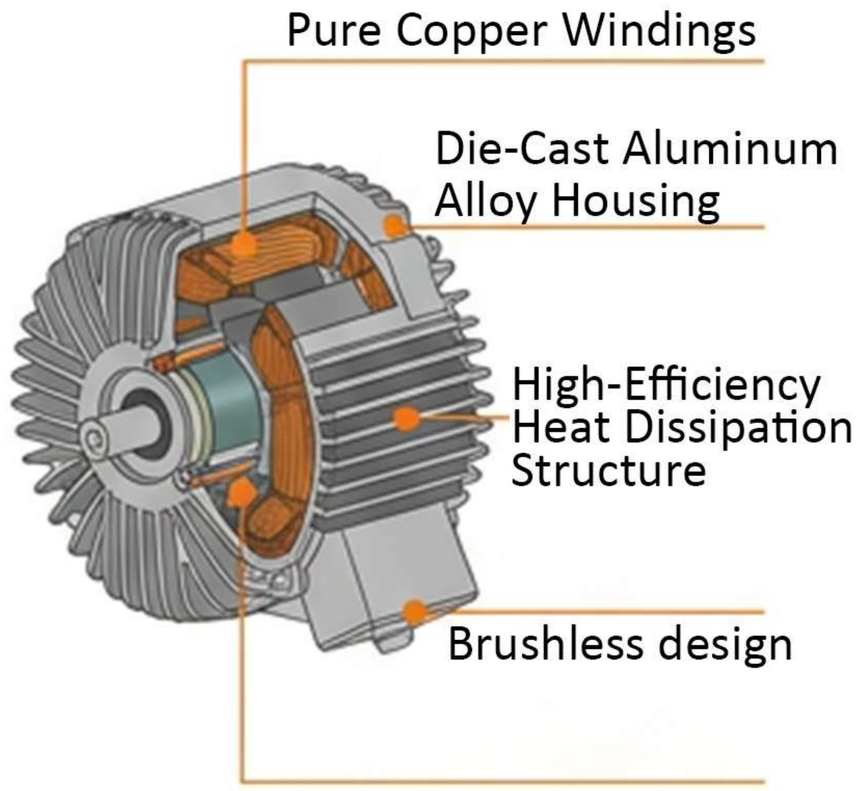

High-Efficiency Drive Motor Powerful, Stable and Energy-Saving

The electric forklift is equipped with a dedicated AC permanent magnet synchronous brushless motor, adopting an independent dual-motor configuration for traveling and lifting. With clear power division and balanced output, it perfectly adapts to various working conditions such as high-frequency start-stop, heavy-load lifting and slope driving in warehousing scenarios. Adopting pure copper winding technology and integrated die-cast aluminum alloy housing, the motor is equipped with an efficient heat dissipation structure, effectively solving power attenuation and overheating problems during long-term heavy-load operation and maintaining stable continuous working performance.

The innovative brushless and maintenance-free structure eliminates the carbon brush wear defect of traditional motors, reducing failure rates fundamentally and greatly lowering later maintenance costs while extending the service life of the equipment. It delivers sufficient torque with smooth starting and linear speed regulation without stalling under heavy loads or climbing. Built-in intelligent temperature monitoring protection avoids overload and overheating damage. Equipped with regenerative braking technology, it automatically recovers electric energy during deceleration and downhill driving to reduce overall energy consumption. Featuring low noise and low vibration, it is suitable for indoor warehouses, closed workshops, logistics and other quiet working scenarios.

- Brushless & maintenance-free design, lower operation cost
- Pure copper winding & efficient heat dissipation, stable under heavy load
- Energy recovery technology, energy-saving and low noise
- High torque output, adaptable to full working conditions

Product advantage

BEIQIANG
B E I Q I A N G

CARRY THE FUTURE
稳定是基础，安全是保障

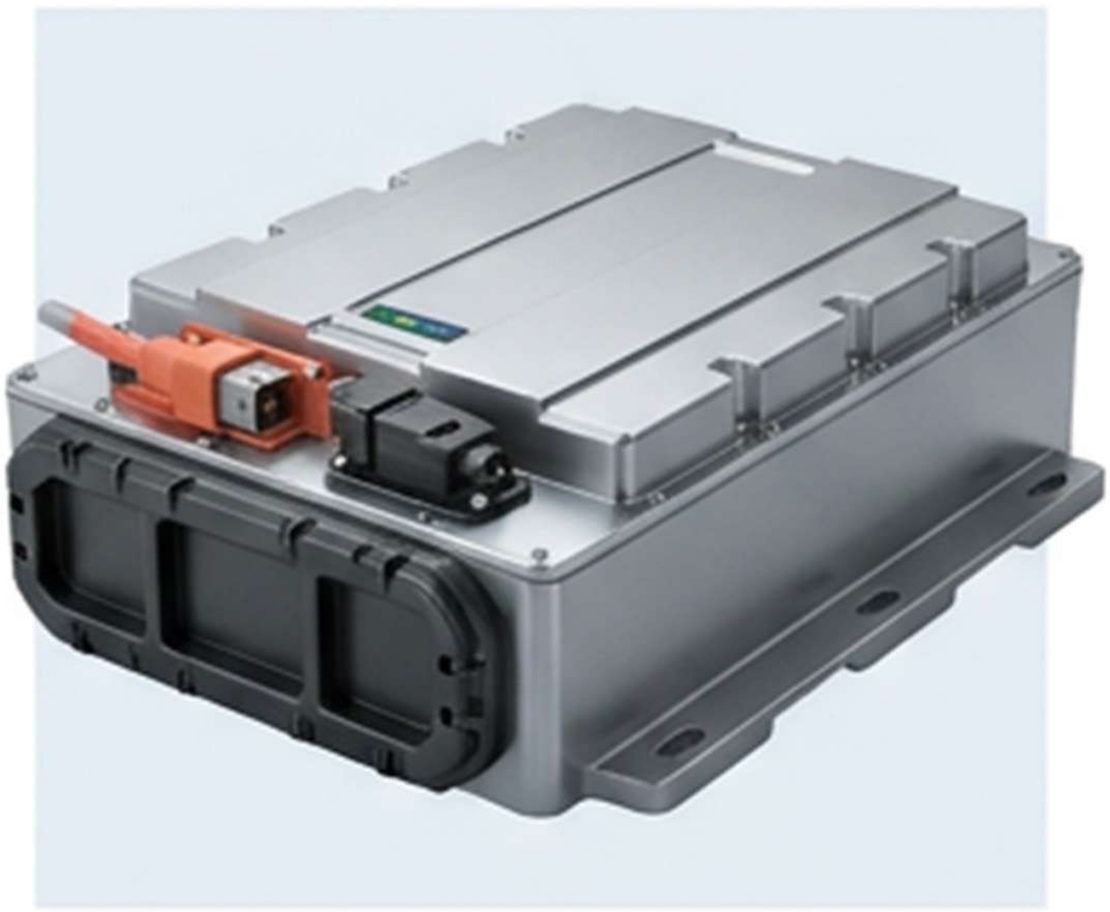





High-Level Industrial Protection Design



Extremely Long Cycle Life



Maintenance-free

Safe LiFePO4 cell with multi-layer protection

Ultra-long cycle life and high durability

Safe LiFePO4 cell with multi-layer protection

Eco-friendly design for modern industrial scenarios

Vehicle energy core, safe, stable, long-lasting and green energy-saving

Safety Power Battery Long Endurance & Maintenance-Free Durability

Equipped with high-performance LiFePO4 power battery pack and upgraded intelligent BMS battery management system, the forklift realizes full-life cycle intelligent battery management. The system monitors cell voltage, current and temperature in real time to accurately judge the battery status. It provides comprehensive protections against over-charging, over-discharging, over-temperature, short circuit and over-current, fundamentally avoiding battery swelling, thermal runaway and short-circuit risks and greatly improving battery safety.

Adopting high-grade industrial protection design, the battery is dustproof, waterproof, shock-resistant and impact-resistant, adapting to complex working environments such as factories and logistics parks. It achieves more than 2000 charge-discharge cycles with low attenuation and stable performance, doubling the service life compared with traditional lead-acid batteries. The full maintenance-free design eliminates regular water refilling and daily maintenance, saving labor and maintenance costs. Supporting high-power fast charging, it meets multi-shift continuous operation requirements with lasting endurance and balanced power output. Zero exhaust and zero acid mist emission make it environmentally friendly and in line with modern green production standards, with customizable capacity for different working demands.

Product advantage



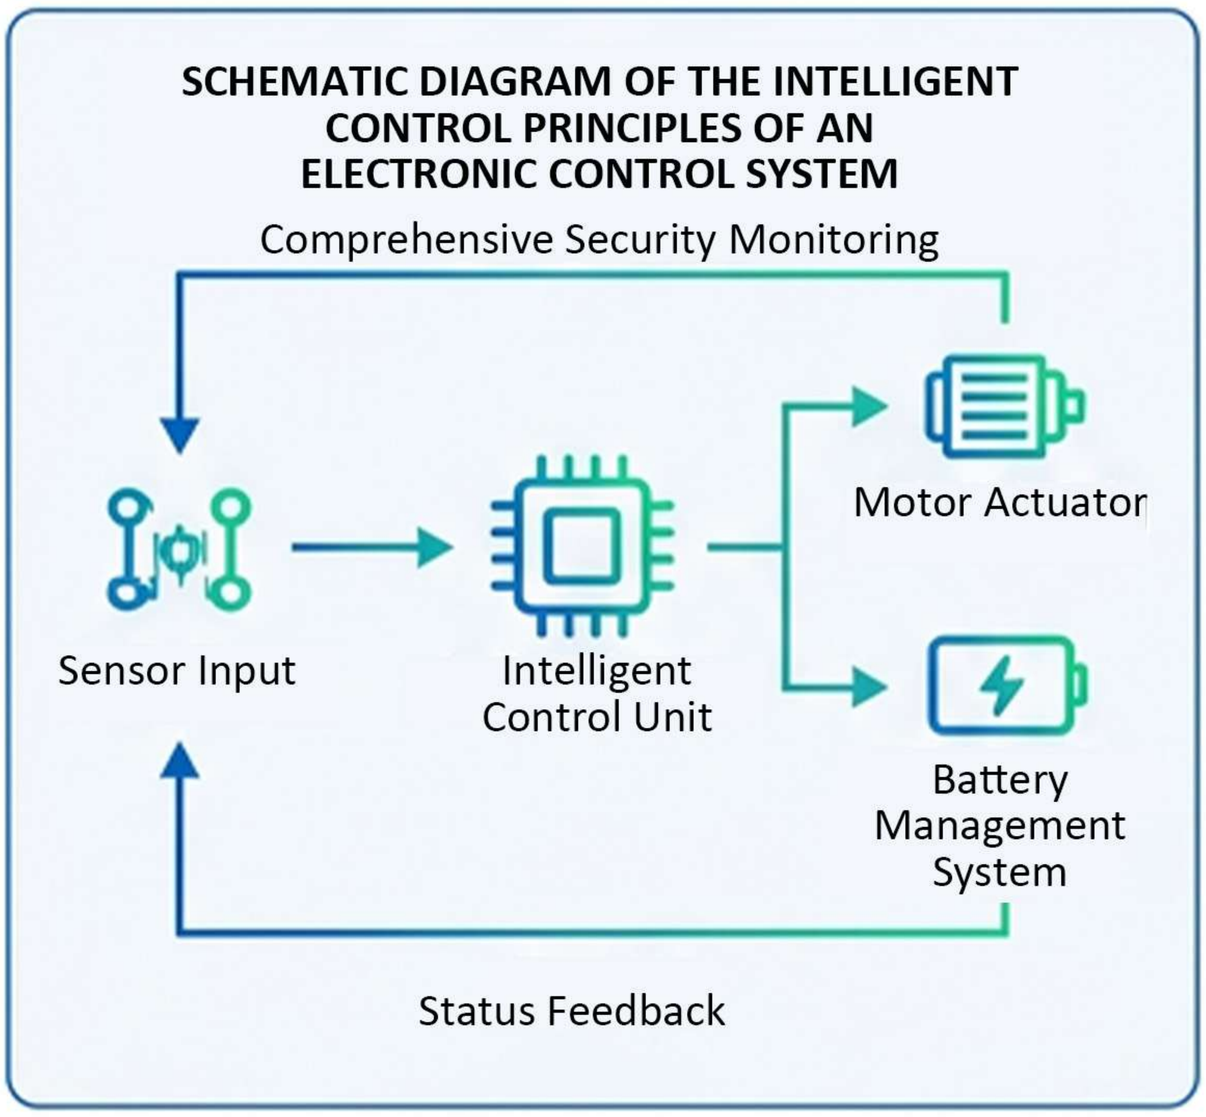

Industrial-grade main control, precise and smooth operation

Multiple safety protections, worry-free operation

Intelligent self-diagnosis, efficient maintenance

Strong anti-interference, adaptable to harsh environments

Intelligent Electronic Control System Precise Control & Full-Range Safety Protection

As the core brain of the electric forklift, the industrial-grade electronic control system adopts high-quality imported power chips with fast operation speed, high control accuracy and strong anti-interference ability, adapting to complex electromagnetic working environments in factories. The fully enclosed aluminum heat dissipation housing with integrated heat dissipation structure provides excellent dustproof, shockproof and heat dissipation performance, ensuring stable operation even under high temperature and dusty harsh conditions. With refined control logic, the system accurately manages all vehicle actions including advancing, retreating, steering, lifting and tilting. The linear and smooth speed regulation brings comfortable operation experience and reduces operator fatigue. Built-in multi-dimensional safety protection functions include over-voltage, under-voltage, over-current, over-temperature, short circuit, slope anti-rollback and emergency braking, effectively avoiding potential safety hazards. It supports CAN bus intelligent communication and real-time data interaction with the battery system. The self-diagnosis and visual fault code display functions realize rapid fault troubleshooting and improve equipment operation efficiency.

北强机械
BEIQIANG MACHINERY

Beiqiang Heavy Industry, Top-tier Intelligent Manufacturing

















BEIQIANG

XINGTAI BEIQIANG MACHINERY MANUFACTURING FACTORY

Address: Industrial Zone, Xingwan Town, Renze District, Xingtai City, Hebei Province

Web:https://www.bq-forklift.com

邢台北强机械制造厂

地址:河北省邢台市任泽区邢湾镇工业区

网址:https://www.bq-forklift.com